



Republic of the Philippine
TARLAC STATE UNIVERSITY
Romulo Blvd., San Vicente, Tarlac City
Tel. No.: (045) 982 4630
Website: www.tsu.edu.ph



Bidding Documents

(This Bidding Documents is in conformance with the Sixth Edition of the Philippine Bidding Documents for the Procurement of Infrastructure Projects)

For the Project

Refurbishment of TSU Hotel Rooms 314, 316 & 318 for the College of Medicine

**With an Approved Budget for the Contract (ABC) of
Four Million Four Hundred Seventy Thousand One Hundred
Ninety-Two and 49/100 Pesos (₱ 4,470,192.49)**

**Invitation to Bid No. Infra 06-009-2026
PhilGEPS Reference No.: 13146661**

**July 2020
6th Edition**

TABLE OF CONTENTS

Glossary of Terms, Abbreviations, and Acronyms	1
Section I. Invitation to Bid	3
Section II. Instructions to Bidders	5
1. Scope of Bid	5
2. Funding Information	5
3. Bidding Requirements	5
4. Corrupt, Fraudulent, Collusive, Coercive, and Obstructive Practices	5
5. Eligible Bidders	5
6. Origin of Associated Goods	6
7. Subcontracts	6
8. Pre-Bid Conference	6
9. Clarification and Amendment of Bidding Documents	6
10. Documents Comprising the Bid: Eligibility and Technical Components	6
11. Documents Comprising the Bid: Financial Component	7
12. Alternative Bids	7
13. Bid Prices	7
14. Bid and Payment Currencies	7
15. Bid Security	7
16. Sealing and Marking of Bids	8
17. Deadline for Submission of Bids	8
18. Opening and Preliminary Examination of Bids	8
19. Detailed Evaluation and Comparison of Bids	8
20. Post Qualification	8
21. Signing of the Contract	9
Section III. Bid Data Sheet	10
Section IV. General Conditions of Contract	12
1. Scope of Contract	12
2. Sectional Completion of Works	12
3. Possession of Site	12
4. The Contractor's Obligations	12
5. Performance Security	12
6. Site Investigation Reports	13
7. Warranty	13
8. Liability of the Contractor	13
9. Termination for Other Causes	13
10. Dayworks	13

11. Program of Works	13
12. Instructions, Inspections, and Audits	14
13. Advance Payment	14
14. Progress Payments	14
15. Operating and Maintenance Manuals	14
Section V. Special Conditions of Contract	15
Section VI. Specifications	16
Section VII. Drawings	44
Section VIII. Bill of Quantities	45
Section IX. Checklist of Technical and Financial Documents	48
Section X. Bidding Forms	50

Glossary of Terms, Abbreviations, and Acronyms

ABC – Approved Budget for the Contract.

ARCC – Allowable Range of Contract Cost.

BAC – Bids and Awards Committee.

Bid – A signed offer or proposal to undertake a contract submitted by a bidder in response to and in consonance with the requirements of the bidding documents. Also referred to as *Proposal* and *Tender*. (2016 revised IRR, Section 5[c])

Bidder – Refers to a contractor, manufacturer, supplier, distributor and/or consultant who submits a bid in response to the requirements of the Bidding Documents. (2016 revised IRR, Section 5[d])

Bidding Documents – The documents issued by the Procuring Entity as the bases for bids, furnishing all information necessary for a prospective bidder to prepare a bid for the Goods, Infrastructure Projects, and/or Consulting Services required by the Procuring Entity. (2016 revised IRR, Section 5[e])

BIR – Bureau of Internal Revenue.

BSP – Bangko Sentral ng Pilipinas.

CDA – Cooperative Development Authority.

Consulting Services – Refer to services for Infrastructure Projects and other types of projects or activities of the GOP requiring adequate external technical and professional expertise that are beyond the capability and/or capacity of the GOP to undertake such as, but not limited to: (i) advisory and review services; (ii) pre-investment or feasibility studies; (iii) design; (iv) construction supervision; (v) management and related services; and (vi) other technical services or special studies. (2016 revised IRR, Section 5[i])

Contract – Refers to the agreement entered into between the Procuring Entity and the Supplier or Manufacturer or Distributor or Service Provider for procurement of Goods and Services; Contractor for Procurement of Infrastructure Projects; or Consultant or Consulting Firm for Procurement of Consulting Services; as the case may be, as recorded in the Contract Form signed by the parties, including all attachments and appendices thereto and all documents incorporated by reference therein.

Contractor – is a natural or juridical entity whose proposal was accepted by the Procuring Entity and to whom the Contract to execute the Work was awarded. Contractor as used in these Bidding Documents may likewise refer to a supplier, distributor, manufacturer, or consultant.

CPI – Consumer Price Index.

DOLE – Department of Labor and Employment.

DTI – Department of Trade and Industry.

Foreign-funded Procurement or Foreign-Assisted Project – Refers to procurement whose funding source is from a foreign government, foreign or international financing institution as specified in the Treaty or International or Executive Agreement. (2016 revised IRR, Section 5[b]).

GFI – Government Financial Institution.

GOCC – Government-owned and/or –controlled corporation.

Goods – Refer to all items, supplies, materials and general support services, except Consulting Services and Infrastructure Projects, which may be needed in the transaction of public businesses

or in the pursuit of any government undertaking, project or activity, whether in the nature of equipment, furniture, stationery, materials for construction, or personal property of any kind, including non-personal or contractual services such as the repair and maintenance of equipment and furniture, as well as trucking, hauling, janitorial, security, and related or analogous services, as well as procurement of materials and supplies provided by the Procuring Entity for such services. The term “related” or “analogous services” shall include, but is not limited to, lease or purchase of office space, media advertisements, health maintenance services, and other services essential to the operation of the Procuring Entity. (2016 revised IRR, Section 5[r])

GOP – Government of the Philippines.

Infrastructure Projects – Include the construction, improvement, rehabilitation, demolition, repair, restoration or maintenance of roads and bridges, railways, airports, seaports, communication facilities, civil works components of information technology projects, irrigation, flood control and drainage, water supply, sanitation, sewerage and solid waste management systems, shore protection, energy/power and electrification facilities, national buildings, school buildings, hospital buildings, and other related construction projects of the government. Also referred to as *civil works or works*. (2016 revised IRR, Section 5[u])

LGUs – Local Government Units.

NFCC – Net Financial Contracting Capacity.

NGA – National Government Agency.

PCAB – Philippine Contractors Accreditation Board.

PhilGEPS - Philippine Government Electronic Procurement System.

Procurement Project – refers to a specific or identified procurement covering goods, infrastructure project or consulting services. A Procurement Project shall be described, detailed, and scheduled in the Project Procurement Management Plan prepared by the agency which shall be consolidated in the procuring entity's Annual Procurement Plan. (GPPB Circular No. 06-2019 dated 17 July 2019)

PSA – Philippine Statistics Authority.

SEC – Securities and Exchange Commission.

SLCC – Single Largest Completed Contract.

UN – United Nations.

Section I. Invitation to Bid



Republic of the Philippine
TARLAC STATE UNIVERSITY
Romulo Blvd., San Vicente, Tarlac City
Tel. No.: (045) 982 4630
Website: www.tsu.edu.ph



INVITATION TO BID

For the Project

Refurbishment of TSU Hotel Rooms 314, 316 & 318 for the College of Medicine

Invitation to Bid No. Infra 06-009-2026

1. The Tarlac State University, through **Special Budget (SB) 2026** intends to apply the sum of **Four Million Four Hundred Seventy Thousand One Hundred Ninety-Two and 49/100 Pesos (₱ 4,470,192.49)** to payments under the contract for the project: **Refurbishment of TSU Hotel Rooms 314, 316 & 318 for the College of Medicine.**

Bids received in excess of the ABC shall be automatically rejected at bid opening.

2. The Tarlac State University now invites bids for the aforementioned Project. Completion of the Works is required within **Ninety (90) calendar days**. Bidders should have completed a contract similar to the Project. The description of an eligible bidder is contained in the Bidding Documents, particularly, in Section II. Instructions to Bidders.
3. Bidding will be conducted through open competitive bidding procedures using non- discretionary "pass/fail" criterion as specified in the 2016 revised Implementing Rules and Regulations (IRR) of Republic Act (RA) No. 9184.
4. Interested bidders may obtain further information regarding the bidding and inspect the Bidding Documents from 8:00 A.M. to 5:00 P.M., Tuesday to Friday starting on **July 23,2026**, at this address:

BAC Secretariat

Motorpool and Administration Building
Tarlac State University
Romulo Blvd., San Vicente, Tarlac City
Tel. No. (045) 606-8110, Extension: 142 / 0998 846 0206
Email: tsubacsec2025@gmail.com

5. A complete set of Bidding Documents may be acquired by interested Bidders from **July 23,2026 to August 12, 2026**, from the aforementioned address upon payment of the applicable fee for the Bidding Documents, pursuant to the latest Guidelines issued by the GPPB, in the amount of **₱ 5,000.00**.

It may also be downloaded free of charge from the website of the Philippine Government Electronic Procurement System (PhilGEPS) and the website of the Procuring Entity, provided that Bidders shall pay the applicable fee for the Bidding Documents not later than the submission of their bids.

6. The Tarlac State University will hold a Pre-Bid Conference on **July 31, 2026 (10:00 A.M.)** at the BAC Conference Room, 3rd Floor, Motorpool and Administration Building, Tarlac State University, Romulo Blvd., San Vicente, Tarlac City which shall be open to prospective bidders.
7. Three (3) copies of the bid proposals (one original, and additional copy 1 and 2) must be submitted to the BAC which must be duly received by the BAC Secretariat through manual submission at the office address indicated in the bidding documents, on **August 12, 2026 at 9:30 A.M.** Failure of bidders to comply with the said request of additional copies shall not be a ground for disqualification.

Late submission shall not be accepted.

Motorpool and Administration Building
Tarlac State University
Romulo Blvd., San Vicente, Tarlac City
Tel. No. (045) 606-8110, Extension: 142 / 0998 846 0206
Email: tsubacsec2025@gmail.com

8. All Bids must be accompanied by a bid security in any of the acceptable forms and in the amount stated in ITB Clause 14.
9. Bid opening shall be on **August 12, 2026, at 10:00 A.M.,** at the BAC Conference Room, 3rd Floor, Motorpool and Administration Building, Tarlac State University, Romulo Blvd., San Vicente, Tarlac City. Bids will be opened in the presence of the bidders’ representatives who choose to attend.
10. The Summary of the procurement activities is as follows:

Activities	Date and Time	Venue
Date Posted to PhilGEPS	July 23,2026	N/A
Pre-Bid Conference	July 31, 2026 (10:00 AM)	BAC Conference Room, 3 rd Floor, Motorpool and Administration Building, Tarlac State University, Romulo Blvd., San Vicente, Tarlac City
Deadline of Submission of Bids	August 12, 2026 (09:30 AM)	Procurement Unit, BAC Secretariat Office, 2 nd Floor, Motorpool and Administration Building, Tarlac State University, Romulo Blvd., San Vicente, Tarlac City
Opening of Bids	August 12, 2026 (10:00 AM)	BAC Conference Room, 3 rd Floor, Motorpool and Administration Building, Tarlac State University, Romulo Blvd., San Vicente, Tarlac City

11. The Tarlac State University reserves the right to reject any and all bids, declare a failure of bidding, or not award the contract at any time prior to contract award in accordance with Sections 35.6 and 41 of the 2016 Revised IRR of RA 9184, without thereby incurring any liability to the affected bidder or bidders.
12. For further information, please refer to:

Ms. Mariel C. Santos
BAC Secretariat
Motorpool and Administration Building
Tarlac State University
Romulo Blvd., San Vicente, Tarlac City
Tel. No. (045) 606-8110, Extension: 142 / 0998 846 0206
Email: tsubacsec2025@gmail.com



DR. MARLON V. GAMIDO
BAC Chairperson

Section II. Instructions to Bidders

1. Scope of Bid

1. The Procuring Entity, **Tarlac State University** invites Bids for the project: **Refurbishment of TSU Hotel Rooms 314, 316 & 318 for the College of Medicine.** with Project Identification Number: Invitation to Bid No. **Infra 06-009-2026.**

The Procurement Project (referred to herein as “Project”) is for the construction of Works, as described in Section VI. Specifications.

2. Funding Information

- 2.1. The GOP through the source of funding as indicated below for **2026** in the amount of **₱ 4,470,192.49**
- 2.2. The source of funding is the **Special Budget.**

3. Bidding Requirements

- 3.1. The Bidding for the Project shall be governed by all the provisions of RA No. 9184 and its 2016 revised IRR, including its Generic Procurement Manual and associated policies, rules and regulations as the primary source thereof, while the herein clauses shall serve as the secondary source thereof.
- 3.2. Any amendments made to the IRR and other GPPB issuances shall be applicable only to the ongoing posting, advertisement, or invitation to bid by the BAC through the issuance of a supplemental or bid bulletin.
- 3.3. The Bidder, by the act of submitting its Bid, shall be deemed to have inspected the site, determined the general characteristics of the contracted Works and the conditions for this Project, such as the location and the nature of the work; (b) climatic conditions; (c) transportation facilities; (c) nature and condition of the terrain, geological conditions at the site communication facilities, requirements, location and availability of construction aggregates and other materials, labor, water, electric power and access roads; and (d) other factors that may affect the cost, duration and execution or implementation of the contract, project, or work and examine all instructions, forms, terms, and project requirements in the Bidding Documents.

4. Corrupt, Fraudulent, Collusive, Coercive, and Obstructive Practices

The Procuring Entity, as well as the Bidders and Contractors, shall observe the highest standard of ethics during the procurement and execution of the contract. They or through an agent shall not engage in corrupt, fraudulent, collusive, coercive, and obstructive practices defined under Annex “I” of the 2016 revised IRR of RA No. 9184 or other integrity violations in competing for the Project.

5. Eligible Bidders

- 5.1. Only Bids of Bidders found to be legally, technically, and financially capable will be evaluated.

- 5.2. The Bidder must have an experience of having completed a Single Largest Completed Contract (SLCC) that is similar to this Project, equivalent to at least fifty percent (50%) of the ABC adjusted, if necessary, by the Bidder to current prices using the PSA's CPI, except under conditions provided for in Section 23.4.2.4 of the 2016 revised IRR of RA No. 9184.

A contract is considered to be "similar" to the contract to be bid if it has the major categories of work stated in the **BDS**.

- 5.3. The Bidders shall comply with the eligibility criteria under Section 23.4.2 of the 2016 IRR of RA No. 9184.

6. Origin of Associated Goods

There is no restriction on the origin of Goods other than those prohibited by a decision of the UN Security Council taken under Chapter VII of the Charter of the UN.

7. Subcontracts

- 7.1. The Procuring Entity has prescribed that subcontracting is not allowed.

8. Pre-Bid Conference

The Procuring Entity will hold a pre-bid conference for this Project on the specified date and time and either at the address indicated in paragraph 6 of the **IB**.

9. Clarification and Amendment of Bidding Documents

Prospective bidders may request for clarification on and/or interpretation of any part of the Bidding Documents. Such requests must be in writing and received by the Procuring Entity, either at its given address or through electronic mail indicated in the **IB**, at least ten (10) calendar days before the deadline set for the submission and receipt of Bids.

10. Documents Comprising the Bid: Eligibility and Technical Components

- 10.1. The first envelope shall contain the eligibility and technical documents of the Bid as specified in **Section IX. Checklist of Technical and Financial Documents**.
- 10.2. If the eligibility requirements or statements, the bids, and all other documents for submission to the BAC are in foreign language other than English, it must be accompanied by a translation in English, which shall be authenticated by the appropriate Philippine foreign service establishment, post, or the equivalent office having jurisdiction over the foreign bidder's affairs in the Philippines. For Contracting Parties to the Apostille Convention, only the translated documents shall be authenticated through an apostille pursuant to GPPB Resolution No. 13-2019 dated 23 May 2019. The English translation shall govern, for purposes of interpretation of the bid.
- 10.3. A valid PCAB License is required, and in case of joint ventures, a valid special PCAB License, and registration for the type and cost of the contract for this Project. Any additional type of Contractor license or permit shall be indicated in the **BDS**.

104. A List of Contractor's key personnel (e.g., Project Manager, Project Engineers, Materials Engineers, and Foremen) assigned to the contract to be bid, with their complete qualification and experience data shall be provided. These key personnel must meet the required minimum years of experience set in the **BDS**.
105. A List of Contractor's major equipment units, which are owned, leased, and/or under purchase agreements, supported by proof of ownership, certification of availability of equipment from the equipment lessor/vendor for the duration of the project, as the case may be, must meet the minimum requirements for the contract set in the **BDS**.

11. Documents Comprising the Bid: Financial Component

- 11.1. The second bid envelope shall contain the financial documents for the Bid as specified in **Section IX. Checklist of Technical and Financial Documents**.
- 11.2. Any bid exceeding the ABC indicated in paragraph 1 of the **IB** shall not be accepted.
- 11.3. For Foreign-funded procurement, a ceiling may be applied to bid prices provided the conditions are met under Section 31.2 of the 2016 revised IRR of RA No. 9184.

12. Alternative Bids

Bidders shall submit offers that comply with the requirements of the Bidding Documents, including the basic technical design as indicated in the drawings and specifications. Unless there is a value engineering clause in the **BDS**, alternative Bids shall not be accepted.

13. Bid Prices

All bid prices for the given scope of work in the Project as awarded shall be considered as fixed prices, and therefore not subject to price escalation during contract implementation, except under extraordinary circumstances as determined by the NEDA and approved by the GPPB pursuant to the revised Guidelines for Contract Price Escalation guidelines.

14. Bid and Payment Currencies

- 14.1. Bid prices may be quoted in the local currency or tradeable currency accepted by the BSP at the discretion of the Bidder. However, for purposes of bid evaluation, Bids denominated in foreign currencies shall be converted to Philippine currency based on the exchange rate as published in the BSP reference rate bulletin on the day of the bid opening.
- 14.2. Payment of the contract price shall be made in Philippine Pesos.

15. Bid Security

- 15.1. The Bidder shall submit a Bid Securing Declaration or any form of Bid Security in the amount indicated in the **BDS**, which shall be not less than the percentage of the ABC in accordance with the schedule in the **BDS**.
- 15.2. The Bid and bid security shall be valid until **December 10, 2026**. Any bid not accompanied by an acceptable bid security shall be rejected by the Procuring Entity as non-responsive.

16. Sealing and Marking of Bids

- 16.1. Each Bidder **shall submit one copy of the first and second components of its Bid.**
- 16.2. The Procuring Entity may **request additional hard copies** and/or electronic copies of the Bid. However, failure of the Bidders to comply with the said request shall not be a ground for disqualification.
- 16.3. If the Procuring Entity allows the submission of bids through online submission to the given website or any other electronic means, the Bidder shall submit an electronic copy of its Bid, which must be digitally signed. An electronic copy that cannot be opened or is corrupted shall be considered non-responsive and, thus, automatically disqualified.

17. Deadline for Submission of Bids

The Bidders shall submit on the specified date and time and either at its physical address or through online submission as indicated in paragraph 7 of the **IB**.

18. Opening and Preliminary Examination of Bids

- 18.1. The BAC shall open the Bids in public at the time, on the date, and at the place specified in paragraph 9 of the **IB**. The Bidders' representatives who are present shall sign a register evidencing their attendance. In case videoconferencing, webcasting or other similar technologies will be used, attendance of participants shall likewise be recorded by the BAC Secretariat.

In case the Bids cannot be opened as scheduled due to justifiable reasons, the rescheduling requirements under Section 29 of the 2016 revised IRR of RA No. 9184 shall prevail.

- 18.2. The preliminary examination of Bids shall be governed by Section 30 of the 2016 revised IRR of RA No. 9184.

19. Detailed Evaluation and Comparison of Bids

- 19.1. The Procuring Entity's BAC shall immediately conduct a detailed evaluation of all Bids rated "*passed*" using non-discretionary pass/fail criteria. The BAC shall consider the conditions in the evaluation of Bids under Section 32.2 of 2016 revised IRR of RA No. 9184.
- 19.2. If the Project allows partial bids, all Bids and combinations of Bids as indicated in the **BDS** shall be received by the same deadline and opened and evaluated simultaneously so as to determine the Bid or combination of Bids offering the lowest calculated cost to the Procuring Entity. Bid Security as required by **ITB** Clause 16 shall be submitted for each contract (lot) separately.
- 19.3. In all cases, the NFCC computation pursuant to Section 23.4.2.6 of the 2016 revised IRR of RA No. 9184 must be sufficient for the total of the ABCs for all the lots participated in by the prospective Bidder.

20. Post Qualification

Within a **non-extendible period of five (5) calendar days** from receipt by the Bidder of the notice from the BAC that it submitted the Lowest Calculated Bid, the Bidder shall submit its

latest income and business tax returns filed and paid through the BIR Electronic Filing and Payment System (eFPS), and other appropriate licenses and permits required by law and stated in the **BDS**.

21. Signing of the Contract

The documents required in Section 37.2 of the 2016 revised IRR of RA No. 9184 shall form part of the Contract. Additional Contract documents are indicated in the **BDS**.

Section III. Bid Data Sheet

ITB Clause			
5.2	For this purpose, contracts similar to the Project refer to contracts for the Construction or Renovation of a single storey, or other similar structures.		
7.1	No further instructions.		
10.3	No additional requirements.		
10.4	The minimum work experience requirements for key personnel are the following:		
	Key Personnel	Qualification and Experience	
	Civil Engineer / Architect (Project In-charge)	With at least 2 years of experience in construction project supervision as a licensed professional.	
	Registered Electrical Engineer / Master Electrician	With at least 1 year of experience in construction project supervision as a licensed professional.	
	Registered Mechanical Engineer	With at least 1 year of experience in construction project supervision as a licensed professional.	
	Safety Officer II	- DOLE accredited construction occupation safety officer. - With at least 1 year of experience as a Safety Officer in construction projects.	
	Foreman	With at least 3 years of experience as foreman in building construction project.	
10.5	The minimum major equipment requirements are the following:		
	Equipment	Min. Capacity	Min. Quantity
	Elf Truck	3-5 cu.m.	1
	Welding Machine	300A&600A	1
	Angle Grinder	700W	1
	Cut-off Machine	Up to 8” tube	1
	The bidder must state and show proof that the equipment to be pledged for the project are owned or leased.		
12	No further instructions.		
15.1	The bid security shall be in the form of a Bid Securing Declaration or any of the following forms and amounts: 1. The amount of not less than ₱ 89,403.85 (2 % of ABC), if bid security is in cash, cashier’s/manager’s check, bank draft/guarantee or irrevocable letter of credit. 2. The amount of not less than ₱ 223,509.62 (5 % of ABC) if bid security is in Surety Bond.		
19.2	Partial bid is not allowed. The project is packaged in a single lot and the lot shall not be divided into sub-lots for the purpose of bidding, evaluation, and contract award.		
21	The winning bidder shall submit the following documents, which shall form part of the Contract documents: 1. Construction Schedule and S-Curve, 2. Manpower Schedule, 3. Construction Methods		

	4. Equipment Utilization Schedule 5. Construction Safety and Health Program approved by the Department of Labor and Employment, and PERT/CPM.
--	---

Section IV. General Conditions of Contract

1. Scope of Contract

This Contract shall include all such items, although not specifically mentioned, that can be reasonably inferred as being required for its completion as if such items were expressly mentioned herein. All the provisions of RA No. 9184 and its 2016 revised IRR, including the Generic Procurement Manual, and associated issuances, constitute the primary source for the terms and conditions of the Contract, and thus, applicable in contract implementation. Herein clauses shall serve as the secondary source for the terms and conditions of the Contract.

This is without prejudice to Sections 74.1 and 74.2 of the 2016 revised IRR of RA No. 9184 allowing the GPPB to amend the IRR, which shall be applied to all procurement activities, the advertisement, posting, or invitation of which were issued after the effectivity of the said amendment.

2. Sectional Completion of Works

If sectional completion is specified in the **Special Conditions of Contract (SCC)**, references in the Conditions of Contract to the Works, the Completion Date, and the Intended Completion Date shall apply to any Section of the Works (other than references to the Completion Date and Intended Completion Date for the whole of the Works).

3. Possession of Site

- 3.1. The Procuring Entity shall give possession of all or parts of the Site to the Contractor based on the schedule of delivery indicated in the SCC, which corresponds to the execution of the Works. If the Contractor suffers delay or incurs cost from failure on the part of the Procuring Entity to give possession in accordance with the terms of this clause, the Procuring Entity's Representative shall give the Contractor a Contract Time Extension and certify such sum as fair to cover the cost incurred, which sum shall be paid by Procuring Entity.
- 3.2. If possession of a portion is not given by the above date, the Procuring Entity will be deemed to have delayed the start of the relevant activities. The resulting adjustments in contract time to address such delay may be addressed through contract extension provided under Annex "E" of the 2016 revised IRR of RA No. 9184.

4. The Contractor's Obligations

The Contractor shall employ the key personnel named in the Schedule of Key Personnel indicating their designation, in accordance with **ITB** Clause 10.3 and specified in the **BDS**, to carry out the supervision of the Works.

The Procuring Entity will approve any proposed replacement of key personnel only if their relevant qualifications and abilities are equal to or better than those of the personnel listed in the Schedule.

5. Performance Security

- 5.1. Within ten (10) calendar days from receipt of the Notice of Award from the Procuring Entity but in no case later than the signing of the contract by both parties, the successful Bidder shall furnish the performance security in any of the forms prescribed in Section 39 of the 2016 revised IRR.

- 5.2. The Contractor, by entering into the Contract with the Procuring Entity, acknowledges the right of the Procuring Entity to institute action pursuant to RA No. 3688 against any subcontractor be they an individual, firm, partnership, corporation, or association supplying the Contractor with labor, materials and/or equipment for the performance of this Contract.

6. Site Investigation Reports

The Contractor, in preparing the Bid, shall rely on any Site Investigation Reports referred to in the SCC supplemented by any information obtained by the Contractor.

7. Warranty

- 7.1. In case the Contractor fails to undertake the repair works under Section 62.2.2 of the 2016 revised IRR, the Procuring Entity shall forfeit its performance security, subject its property(ies) to attachment or garnishment proceedings, and perpetually disqualify it from participating in any public bidding. All payables of the GOP in his favor shall be offset to recover the costs.
- 7.2. The warranty against Structural Defects/Failures, except that occasioned-on force majeure, shall cover the period from the date of issuance of the Certificate of Final Acceptance by the Procuring Entity. Specific duration of the warranty is found in the SCC.

8. Liability of the Contractor

Subject to additional provisions, if any, set forth in the SCC, the Contractor's liability under this Contract shall be as provided by the laws of the Republic of the Philippines.

If the Contractor is a joint venture, all partners to the joint venture shall be jointly and severally liable to the Procuring Entity.

9. Termination for Other Causes

Contract termination shall be initiated in case it is determined *prima facie* by the Procuring Entity that the Contractor has engaged, before, or during the implementation of the contract, in unlawful deeds and behaviors relative to contract acquisition and implementation, such as, but not limited to corrupt, fraudulent, collusive, coercive, and obstructive practices as stated in ITB Clause 4.

10. Dayworks

Subject to the guidelines on Variation Order in Annex "E" of the 2016 revised IRR of RA No. 9184, and if applicable as indicated in the SCC, the Dayworks rates in the Contractor's Bid shall be used for small additional amounts of work only when the Procuring Entity's Representative has given written instructions in advance for additional work to be paid for in that way.

11. Program of Work

- 11.1. The Contractor shall submit to the Procuring Entity's Representative for approval the said Program of Work showing the general methods, arrangements, order, and timing for all the activities in the Works. The submissions of the Program of Work are indicated in the SCC.
- 11.2. The Contractor shall submit to the Procuring Entity's Representative for approval an updated Program of Work at intervals no longer than the period stated in the SCC. If the

Contractor does not submit an updated Program of Work within this period, the Procuring Entity's Representative may withhold the amount stated in the SCC from the next payment certificate and continue to withhold this amount until the next payment after the date on which the overdue Program of Work has been submitted.

12. Instructions, Inspections and Audits

The Contractor shall permit the GOP or the Procuring Entity to inspect the Contractor's accounts and records relating to the performance of the Contractor and to have them audited by auditors of the GOP or the Procuring Entity, as may be required.

13. Advance Payment

The Procuring Entity shall, upon a written request of the Contractor which shall be submitted as a Contract document, make an advance payment to the Contractor in an amount not exceeding fifteen percent (15%) of the total contract price, to be made in lump sum, or at the most two installments according to a schedule specified in the SCC, subject to the requirements in Annex "E" of the 2016 revised IRR of RA No. 9184.

14. Progress Payments

The Contractor may submit a request for payment for Work accomplished. Such requests for payment shall be verified and certified by the Procuring Entity's Representative/Project Engineer. Except as otherwise stipulated in the SCC, materials and equipment delivered on the site but not completely put in place shall not be included for payment.

15. Operating and Maintenance Manuals

- 15.1. If required, the Contractor will provide "as built" Drawings and/or operating and maintenance manuals as specified in the SCC.
- 15.2. If the Contractor does not provide the Drawings and/or manuals by the dates stated above, or they do not receive the Procuring Entity's Representative's approval, the Procuring Entity's Representative may withhold the amount stated in the SCC from payments due to the Contractor.

Section V – Special Conditions of Contract

GCC Clause	
2	Not applicable.
4.1	Upon acknowledgement of receipt of the Notice to Proceed.
6	The site investigation reports are: as indicated in the Technical Specifications.
7.2	As prescribed in Section 62.2.3.2 of the 2016 revised IRR of R.A. 9184.
10	No dayworks are applicable to the contract.
11.1	The Contractor shall submit the Program of Work to the Procuring Entity's Representative within five (5) days of delivery of the Notice of Award.
11.2	The amount to be withheld for late submission of an updated Program of Work is ten percent (10 %) of the amount of progress billing for the period.
13	The amount of the advance payment shall not exceed fifteen percent (15 %) of the contract price.
14	Materials and equipment delivered on the site but not completely put in place shall be included for payment.
15.1	The date by which operation and maintenance manuals are required is within ten (10) days after the final inspection. The date by which “as built” drawings are required is ten (10) days after the final inspection.
15.2	The amount to be withheld for failing to produce “as built” drawings and/or operating and maintenance manuals by the date required is ten percent (10 %) of the final billing.

Section VI – Specifications

SECTION 1 – GENERAL CONDITIONS AND REQUIREMENTS

1.1. SCOPE OF WORK

1.1.1. The project shall cover the completion of the **REFURBISHMENT OF TSU HOTEL ROOMS 314, 316, & 318 FOR THE COLLEGE OF MEDICINE**, which shall include the supervision and furnishing of labor, supplies, materials, equipment, and ancillary services necessary to effectively execute and deliver the required work output in accordance with the contract and project specifications.

1.2. CONTRACT DRAWINGS

1.2.1. Details and extent of work are shown in the Drawings accompanying these specifications.

1.2.2. Sketches and other details not shown in the Drawings shall be furnished by the Engineer/Architect during the phase of construction.

1.3. PARTS OF THE SPECIFICATIONS

1.3.1. These specifications include the following parts in which applicable provisions are binding on this contract.

SECTION 1	GENERAL CONDITIONS AND REQUIREMENTS
SECTION 2	DEMOLITION, HAULING, DISPOSAL, AND REPAIR WORKS
SECTION 3	ARCHITECTURAL WORKS
SECTION 4	ELECTRICAL WORKS
SECTION 5	MECHANICAL WORKS
SECTION 6	SUPPLY, DELIVERY, AND INSTALLATION OF OFFICE FURNITURE, APPLIANCES, AND AIR CONDITIONING UNITS

1.4. WORKMANSHIP

1.4.1. All operations required under all parts of the specifications shall be undertaken with the utmost workmanship and professional quality. Only skilled personnel with sufficient experience in similar operations shall be allowed to undertake the same.

1.5. INSPECTION OF SITE

1.5.1. The Contractor’s Bid shall be deemed as having been prepared with due consideration of the physical conditions at the site. By submitting the Tender, the Contractor certifies that they have conducted a comprehensive inspection and examination of the site and its surroundings. This inspection has informed their understanding of the scope of work, materials required for completion, means of access, and any necessary accommodation. Furthermore, the Contractor attests that they have acquired all relevant information regarding potential risks, contingencies, and any other factors that could influence or impact their Tender. The Contractor acknowledges that failure to inspect and examine the site conditions will not justify any request for additional costs or extensions of time

1.6. CONFLICT BETWEEN PLANS AND SPECIFICATIONS

1.6.1. The documents forming the Contract are to be taken as mutually explanatory of one another. For the purposes of interpretation, the priority of the documents shall be in accordance with the following sequence.

1.6.1.1. the Contract and its attachments (Approved Budget for the Contract, Terms of Reference, etc.)

- 1.6.1.2. the Specific Conditions of the Contract
- 1.6.1.3. the General Conditions of the Contract
- 1.6.1.4. the Technical Specifications
- 1.6.1.5. the Drawings
- 1.6.1.6. the Project Schedule and any other pertinent documents

1.6.2. Any omissions in the specifications regarding necessary work or works for the project's completion shall be executed by the Contractor as if such work were explicitly detailed in the drawings, without incurring additional costs. All such work shall be performed in accordance with standard practices, adhering to the requisite quality standards for both materials and workmanship.

1.6.3. Should there be any ambiguity or conflict between indication on drawings and provisions in specifications, the same shall be referred to the Engineer/Architect of TSU for resolution.

1.7. APPROVAL

1.7.1. The Contractor shall submit for the Engineer/Architect's approval, the complete list of manufacturer's names of all equipment and materials they propose to use for the project prior to actual installation on site.

1.8. REJECTIONS

1.8.1. All materials and workmanship must strictly comply with the specifications outlined in this contract. Any materials or workmanship failing to meet these standards may be rejected at any stage during project execution. The Contractor will receive formal documentation of any rejection issued by the authorized technical representative of TSU. Any completed work found to be non-compliant with the quality and specifications required by the project plans shall be promptly dismantled, removed, and reconstructed or otherwise corrected to meet all contractual and technical requirements.

1.9. VARIATIONS

1.9.1. The Engineer/Architect reserves the authority to implement minor adjustments in the work details or materials as deemed necessary. Such modifications may involve revisions to the shapes or dimensions of project elements. Any changes that result in additional costs to the Contractor will be subject to a corresponding adjustment of the contract price, as stipulated in the terms of the agreement.

1.10. AS-BUILT DRAWING AND PICTURES

1.10.1. The Contractor, with the approval of the Engineer/Architect shall mark down all the revisions, omissions, and/or additions to the various works on two sets of drawing plans as the construction progresses. One set of the plans as marked shall be submitted to the Engineer/Architect after the completion of work.

1.10.2. The Contractor shall submit As-Built Drawings to TSU, reflecting all modifications made and documented in the marked drawings retained by the Contractor. The As-Built Drawings shall be prepared in a reproducible format and provided alongside a minimum of three (3) A3-sized copies (11.7 in. x 16.6 in.).

1.10.3. The Contractor shall submit to TSU pictures of the site before, during, and after construction in reproducible and printed forms.

1.11. BILLBOARD

- 1.11.1. Upon possession of the project site, the Contractor shall immediately erect the Billboard, showing the relevant details of the project, at the location and position designated by TSU and of the dimensions and materials approved by TSU.

1.12. TEMPORARY FACILITIES

- 1.12.1. Upon possession of the project site, the Contractor shall immediately erect temporary facilities such as a field office, storage for equipment and materials, portable toilet, electric and water supply connections, etc., at the location designated by, and using only materials and the manner of construction approved by TSU.

1.13. MOBILIZATION AND DEMOBILIZATION

- 1.13.1. Upon receipt and acceptance of the Notice to Proceed, the Contractor shall immediately mobilize their workforce, equipment, materials, and secure the project site with proper and prompt coordination to the Project-in-Charge.
- 1.13.2. Upon completion of the work, the Contractor shall commence the demobilization of the workforce, equipment, and materials and turn over the project site to TSU.

1.14. CONSTRUCTION OCCUPATION SAFETY AND HEALTH

- 1.14.1. The Contractor shall be responsible for ensuring the safety and health of the personnel assigned at the project site and other parties who may be affected in the implementation of the project.
- 1.14.2. The Contractor shall submit to TSU a copy of the Construction Occupation Safety and Health Program for the project that is duly approved by the Department of Labor and Employment before commencing with the work.
- 1.14.3. The Contractor shall designate a competent and qualified Safety Officer for the whole duration of the project.
- 1.14.4. The Contractor shall establish and implement safety procedures for all relevant jobs, tasks, and operations.
- 1.14.5. All personnel assigned to the project are expected to report for work in their proper uniforms, basic safety gear (helmets, boots, or shoes), and identification cards (IDs). The uniforms, basic safety gear, and IDs shall be provided by the Contractor at his/her own expense.
- 1.14.6. The Contractor shall erect temporary barricades, install early warning and precautionary signs, and provide other safety devices that may be required to keep the job site safe and secured. Use roof sheet or plywood for temporary barricade with standard height and stable framing within the construction site as indicated in the plan: do not use "Blue Sack".
- 1.14.7. The Contractor shall maintain, at the project site, ample supplies of expendable materials for the safety and health of its personnel and other affected parties such as safety tape, first-aid kits, safety gloves, dust masks, etc., the cost of which shall be included in the contract price.
- 1.14.8. The Contractor shall keep a record of all incidents (near-miss or accident) and report the same to the TSU Architect/Engineer.

SECTION 2 – DEMOLITION, HAULING, DISPOSAL, AND REPAIR WORKS

2.1. SCOPE OF WORKS

- 2.1.1. Demolition of existing walls, doors, windows, ceiling and floor tiles, hauling and disposal shall include the removal and repair of all affected structures needed to complete the project.

2.2. PREVENTION OF DAMAGE TO ADJOINING PROPERTY

- 2.2.1. The Contractor shall take all necessary precautions to protect and preserve adjacent properties, trees, materials, and existing facilities, including conduits, drains, sewers, pipes, and other utilities that are to remain on the property. The Contractor shall be responsible for repairing or restoring any damage to these elements at no additional cost to TSU, regardless of the cause of the damage during the course of the work.

2.3. HAULING AND DISPOSAL

- 2.3.1. All unusable materials and debris resulting from the performance of work shall be removed from the premises and disposed of in the location and manner that shall be approved by TSU. All materials that can be reused shall be hauled and arranged properly by the Contractor before turning them over to TSU.

2.4. REPAIR/RESTORATION WORKS

2.4.1. Concrete Works

2.4.1.1. Materials

- 2.4.1.1.1. Concrete Aggregates – shall conform to “Specification for Aggregates” (ASTM G33 latest revision). The maximum size of the aggregates shall not be larger than one-fifth (1/5) of the narrowest dimension between the sides of the forms of the member for which the concrete is to be used and not larger than three-fourths (3/4) of the minimum clear spacing between individual reinforcing bars and in no case larger than two (2) inches in diameter.

- 2.4.1.1.2. Reinforcing steel bars shall conform to ASTM Designation A-615-68 specifications for the structural grade. Grade of reinforcing steel bars shall be as follows:

Diameter	Grade
10 mm & above	G40 (276 MPa)

- 2.4.1.1.3. Sand and gravel shall be well-graded and free from any deleterious materials. The fine aggregate shall be washed sand and the size of course aggregates must be ¾” crushed gravel.

- 2.4.1.1.4. Cement and aggregates shall be stored in a manner as to prevent their deterioration or the intrusion of foreign matter. Materials of deteriorated quality or which have been damaged shall not be used for concrete. Cement whose quality is questionable shall be tested by standard mortar test to determine its suitability for use.

- 2.4.1.1.5. Forms shall conform to the shape, lines, and dimension of the member as called for on the plans and shall be substantial and sufficiently tight to prevent leakage of mortar. They shall be properly braced or tied to maintain position and shape.

- 2.4.1.1.6. Plywood, metal, plastic materials, or surfaced lumber forms shall be used where it will best give the most advantage in the specific concrete work involved.

2.4.1.1.7. Unless otherwise ordered, forms and shoring shall not be disturbed and shall remain in place for a minimum period in accordance with the following schedule.

Lintel Beams	2 days
--------------	--------

2.4.1.2. Workmanship

2.4.1.2.1. Before placing reinforcement and before pouring concrete, remove all loose rust, mill, scale, oil, or other adhering materials which tend to reduce or destroy the bond between concrete and reinforcement.

2.4.1.2.2. Reinforcing steel bars shall be cut, bent, lapped, or spliced as recommended by CRSI Handbook and ACI Codes. All lap splices of rebars shall conform to Class B Tension Lap Splice unless noted otherwise. All hook ends shall be standard hooks. All stirrups/ties shall have 135° seismic hooks unless noted otherwise.

2.4.1.2.3. Reinforcing steel bars shall be placed accurately and secured in place by use of concrete or metal supports, spacer, or ties to firmly hold them in their proper positions during the pouring and setting of concrete.

2.4.1.2.4. All reinforcing bars shall be cleaned thoroughly of all loose rust, soil, or other material before concrete pouring. No bars partially embedded in concrete shall be field bent, except permitted by the Engineer/Architect. Bars shall not be welded unless authorized by the Engineer/Architect.

2.4.1.2.5. Maintain minimum concrete cover to traverse bars as follows:

Element	Concrete Cover
Lintel Beams	20mm

2.4.2. Masonry and Plastering

2.4.2.1. Materials

2.4.2.1.1. Mortar of cells of CHB’s shall consist of one (1) part cement to three (3) parts sand by volume with sufficient water. It shall be workable cement-sand mixture attaining a 28th day compressive strength of 1500 psi.

2.4.2.1.2. Vertical and horizontal reinforcements shall be provided in masonry. CHB walls shall be reinforced as follows:

Thickness	Horizontal Reinforcement	Vertical Reinforcement
150mm	10mmΦ @ 400mm O.C.	10mmΦ @ 400mm O.C

2.4.2.1.3. Mortar for plastering shall be proportioned one (1) part cement to two (2) parts sand with sufficient water.

2.4.2.2. Workmanship

2.4.2.2.1. CHB’s shall be laid plumb and leveled accurately. Laid units of blocks shall be wetted before laying another unit or layer. Damaged units shall not be used. Units shall be cut accurately to fit all plumbing ducts, opening for electrical works; all holes shall be neatly patched.

2.4.2.2.2. Units shall be placed while the mortar is soft and plastic and shall be used within two and a half (2.5) hours of initial mixing. Mortar that has stiffened should not be used. Any unit disturbed to the extent that the initial bond is

broken after initial positioning shall be removed and re-laid in fresh mortar. All cells of CHB units shall be fully grouted.

2.4.2.2.3. Where CHB walls adjoin columns, beams and walls, dowels with the same size as the vertical or horizontal reinforcement shall be provided.

2.4.2.2.4. No construction support shall be attached to the CHB wall except where specifically permitted by the Architect/Engineer.

SECTION 3 – ARCHITECTURAL WORKS

3.1. TILING WORKS

3.1.1. Scope Of Work

3.1.1.1. The work covered under this section shall include the complete labor, and the supply materials, equipment and necessary to properly conduct and produce the-desired work product.

3.1.2. General

3.1.2.1. Prepare the floors to install directly to their corresponding surfaces. Deliver materials to the job in the manufacturer's unopened containers with the manufacturer's brand and name clearly marked thereon.

3.1.3. Material and Preparation

3.1.3.1. 600mm x 600mm glazed Porcelain floor tiles (Plain white). Approved brand and quality.

3.1.3.2. 3.00 mm thk. x 180 mm x 1220 mm Vinyl Tiles (Wood Texture). Approved brand and quality.

3.1.3.2.1. 1.50 mm thk. x 14.70 mm x 33.00 mm Matte finished Aluminum Stair Nosing (Silver/Brown Matte) fastened to marine plywood. Approved brand and quality.

3.1.4. Installation

3.1.4.1. Clean the existing flooring.

3.1.4.2. Lay tiles in straight square patterns and cover from wall to wall. Install tile in such a manner that each tile is in contact with each adjacent tile and that the entire under-surface of each tile will be securely bonded.

3.1.4.3. Layout the field from the midpoint of the axis of the room so that the opposite end tile will be equal width. Width of the tile shall be subject to the variation required by the dimensions of the room and the size of the tile used. Scribe end tile to the wall and cut in a manner that will insure clean sharp edges.

3.1.4.4. Apply adhesive in accordance with manufacturer's recommendation. Secure cove base to walls with adhesive as specified for floor tiles.

3.1.5. Cleaning

3.1.5.1. Clean flooring of adhesive and other soiling. Remove adhesive with a putty knife and steel wool or with a cloth moistened with a neutral soap of a type approved by the manufacturer. The use of solvents and wet mopping is prohibited.

3.1.6. Protection

3.1.6.1. After cleaning, protect the floor until acceptance of the building.

3.1.7. Guarantee

3.1.7.1. Floors shall be guaranteed by the manufacturer against defects-in its floor tiles and by the Contractor against defects in workmanship for a period of one year from date of completion.

3.2. CEILING AND CLADDING WORKS

3.2.1. Scope Of Work

3.2.1.1. This section shall include all materials, labor, materials, tools, equipment, and services necessary to complete the ceiling and wall works.

3.2.2. Submittal

3.2.2.1. Submit product information from manufacturers for each type of product specified including brochures, catalogs, samples, and certificates of test reports, quality compliance, and accreditation from foreign manufacturers for authenticity of locally distributed materials.

3.2.3. Delivery, Storage, And Handling

3.2.3.1. Deliver materials in manufacturer's original unopened packages clearly marked with identifying information. Protect materials as recommended by the manufacturer.

3.2.3.2. Store materials, keep them dry, and protect against damage from weather, direct sunlight, surface contamination, corrosion, construction traffic, and other causes. Stack gypsum panels on a level surface to prevent sagging.

3.2.4. Material

3.2.4.1. Ceiling

3.2.4.1.1. 600 mm x 600 mm x 12.00 mm thk. Fine Fissured Acoustic Board on T-runner and Metal Furring System. Approved brand, type, and quality.

3.2.4.1.2. 9.00 mm thk. Gypsum Board on a metal furring System. Approved brand and quality.

3.2.4.1.3. 9.00 mm thk. Perforated Gypsum Board on a metal furring System. Approved brand and quality.

3.2.4.1.4. Wall Angle shall (Baked White) be 0.40 mm thick 22 x 22 mm.

3.2.4.1.5. Metal Furring shall be 0.50 mm thick x 19 mm x 50 mm spaced at 400 mm (maximum) or if the thickness is less than 0.50 mm the spacing shall be at 300 mm o. c.

3.2.4.1.6. Carrying Channel 0.40 mm thick x 12 mm x 38 mm spaced at 1200 mm (maximum).

3.2.4.1.7. Complete with screws, double U-clip, and complete accessories

- 3.2.4.1.8. Adhesives for joints, fillers, and fastener concealment shall be of the types recommended in writing by the board manufacturer and as approved for the following uses.
- 3.2.4.1.9. Embedding compounds for first and second coats.
- 3.2.4.1.10. Finishing compound for the final coat.
- 3.2.4.2. False Beam/Operable Metal Track Framing
 - 3.2.4.2.1. Boards must be 9.00 mm thk. Gypsum Board fastened with Blind rivets on 50 mm x 150 mm x 1.50 mm thk. G.I. C-Purlins Horizontal and Vertical Framing. Framing shall be securely anchored to the slab soffit and walls using M10 to M12 galvanized expansion bolts (wedge anchors) with a minimum embedment depth of 75 mm, spaced not more than 600 mm on center. Also, Use self-drilling screws to install boards or as indicated or instructed by the project-in-charge.
- 3.2.5. Installation
 - 3.2.5.1. Framing for furred ceilings shall be installed at the locations indicated in the drawings and shall conform to the standards.
 - 3.2.5.2. Ceiling framing shall be suspended plumb from the structural slab or steel roof frame by hanger wires or straps, spaced no more than 1.20 m on centers. Hanger wires shall be:
 - 3.2.5.2.1. wrapped around the reinforcing bars, of the supporting concrete-slab construction with twists before concrete is placed, or
 - 3.2.5.2.2. shaped into 100 mm diameter loops and embedded at least 50 mm in the concrete, or
 - 3.2.5.2.3. attached to approved inserts.
 - 3.2.5.3. Hanger wires shall be looped around the bottom chord of the open-web steel joist, receiving three full turns around itself or structural steel members, or attached using beam clamps with three full turns. The Hanger Strap must be hung plumb and connected using 10 mm galvanized bolts and nuts to anchors embedded in the concrete or looped around structural framing and connected with 10 mm galvanized bolts and nuts.
 - 3.2.5.4. When splicing channels, ensure the ends overlap by at least 300 mm. The flanges of the channels should interlock and be securely fastened with rivets.
 - 3.2.5.5. Framing is not required for ceilings attached to structural members, except for framing openings as specified. Furring as hereinafter specified shall be attached directly to structural members.
 - 3.2.5.6. Steel channels shall be provided where steel furring is indicated for screw attachment of boards.
 - 3.2.5.7. Furring shall be spliced with 200 mm nested laps securely tied near each end of the lap, with two loops of 1.0 mm tie wire. Splices shall be staggered.
 - 3.2.5.8. Where the board abuts dissimilar wall materials, finish the perimeter of ceilings with an edge bead trim strip applied to the wall and accurately aligned with the finished ceiling. The board edges adjoining walls shall be laid on the horizontal leg of the trim strip against a continuous bead of approved sealant.

- 3.2.5.9. Special framing for beams, columns, soffits, and other special items shall be sized and built to the shapes or forms indicated by rigidly securing each intersection with board screws.
- 3.2.5.10. Provide support members at ceiling openings such as required for access panels, recessed light fixtures, and air supply or exhaust. Support members of not less than 38 mm main runner channels and suspension wires or straps shall be located to provide at least the minimum support specified herein for furring and board attachment.
- 3.2.5.11. The Board shall be applied with the separate boards in moderate contact but not forced into place at internal and external corners. Conceal cut edges with the overlapping covered edges of abutting boards. The boards shall be so staggered that the corners of any boards will not meet a common point except in vertical corners.
- 3.2.5.12. Apply the board to the ceilings with the long dimension perpendicular to the furring members. Alternatively, the long dimension may be applied parallel to furring members spaced 0.40 meters apart, provided end joints are properly supported.

3.2.6. Cleaning and Protection

- 3.2.6.1. Promptly remove any residual joint compound from adjacent surfaces not indicated to receive texture.
- 3.2.6.2. Provide final protection and maintain conditions, in a manner acceptable to the Installer, that ensures gypsum board assemblies are without damage or deterioration at the time of construction completion.

3.3. PAINTING WORKS

3.3.1. Scope Of Work

- 3.3.1.1. The Contractor shall furnish all materials, labor, equipment, and services required to complete the entire painting works herein called for. Painting works shall include the repainting of walls, columns, beams, railings, window frames, etc. of the existing building as specified hereinafter and required thereto.

3.3.2. Material

- 3.3.2.1. The brand of painting materials to be used shall be approved by TSU.
- 3.3.2.2. All steel must be painted with epoxy primer and a topcoat of quick-dry enamel.
- 3.3.2.3. All interior walls and cladding/false beam must be painted with off-white semi-gloss latex paint.
- 3.3.2.4. All baseboards must be painted with brown semi-gloss latex paint.
- 3.3.2.5. All ceilings must be painted with flat latex paint.
- 3.3.2.6. All wainscot must be painted with automotive lacquer paint.
- 3.3.2.7. All paint materials shall be delivered to the job site in their original containers. with labels and seals unbroken.

- 3.3.2.8. Except for ready-mixed materials in original containers, all mixing shall be done at the job site. No materials are to be reduced or changed except as specified by the manufacturer of the said materials. The use of white zinc (lithopone) is prohibited.

3.3.3. Colors

- 3.3.3.1. All colors of paints and varnishes shall be in accordance with the color scheme approved by TSU.
- 3.3.3.2. Submit samples of the proposed colors for approval. Only colors that have been approved may be used.
- 3.3.3.3. No painting shall commence until color schemes have been approved by the Engineer/Architect.
- 3.3.3.4. Finishes for different portions of the work must be indicated in the Schedule of Specifications.

3.3.4. Surface Examination And Preparation

- 3.3.4.1. Before commencement of the work, the Contractor shall examine the surfaces to be applied with paints so as not to compromise the quality and appearance of a painting of finishing work.
- 3.3.4.2. No painting shall be done under conditions that may compromise the quality or appearance of the paint or finish.
- 3.3.4.3. All surfaces to be painted must be cleaned and in proper condition before application.
- 3.3.4.4. Voids, cracks, and all other kinds of defects shall be repaired with proper patching materials and finished flush with the surrounding surfaces.

3.3.5. Surface Conditioning

- 3.3.5.1. Apply topcoat on existing concrete and masonry surfaces.
- 3.3.5.2. Patch and seal hairline cracks and uneven areas with approved putty or patching compound. After correcting all defects, apply the finish coats as specified in the Plan, following the approved color scheme.
- 3.3.5.3. Metals shall be clean, dry, and free from mill scale and rust. Remove all grease and oil from surfaces. Wash unprimed galvanized metal with the etching solution and allow it to dry.
- 3.3.5.4. Metal surfaces shall be primed with epoxy primer.

3.3.6. Application

- 3.3.6.1. Paints, when applied by brush, shall be non-fluid; and thick enough to lay down an adequate film of wet paint. Brush marks must be smoothed out after the application of paint.
- 3.3.6.2. Paints intended for roller application must be similar to those used for brushing paint. The paint should not be sticky when thinned.

3.3.7. Workmanship

3.3.7.1. Experienced and skilled craftsmen shall perform all work to ensure finished work of first-class quality, appearance, and durability.

3.3.7.2. All paints and other coatings shall be mixed and applied strictly following the manufacturer's printed instructions.

3.3.8. Mixing And Thinning

3.3.8.1. At the time of application, paint shall show no sign of deterioration. Paint shall be thoroughly stirred, strained, and kept at a uniform consistency during application.

3.3.8.2. When thinning is necessary, this may be done immediately before application following the manufacturer's directions, but not more than 1 pint of suitable thinner per gallon of paint.

3.3.8.3. Kerosene shall not be used as paint thinner. Paints from the different manufacturers shall not be mixed.

3.3.9. Storage

3.3.9.1. All materials to be used for this item shall be stored in a single place designated by TSU. This storage area must always be kept neat and clean.

3.3.9.2. Take necessary precautions to prevent fire hazards by removing oily rags, waste, and other flammable materials at the end of each workday.

3.3.10. Cleaning

3.3.10.1. All clothes and cotton waste that pose a fire hazard must be placed in metal containers or destroyed at the end of each workday.

3.3.10.2. Upon completion of the work, remove all staging and paint containers, and dispose of them appropriately.

3.3.10.3. Remove any paint drips, oil, or stains from adjacent surfaces. Ensure the entire area is left clean and acceptable to the supervising Architect/Engineer.

3.4. FURNISHING AND ACCESSORIES

3.4.1. Scope of Work

3.4.1.1. The work covered under this section shall include the supply of all labor, materials, tools, and equipment required for the fabrication, finishing, delivery, and proper installation of all furnishing works in accordance with the plans and specifications.

3.4.1.2. All furnishings to be installed must be approved by TSU.

3.4.2. Whiteboard

3.4.2.1. Fabrication and installation of Fixed Whiteboard:

3.4.2.1.1. White High Gloss Formica on 18mm thk. MDF Board (Machine Pressed)

3.4.2.1.2. 1" x 1" white powder coated aluminum perimeter frame and holder.

3.4.2.1.3. Use heavy-duty adhesive and 1 ½" Black Screw for installation

3.4.3. Wainscot

3.4.3.1. Fabrication and Installation of Wainscot:

- 3.4.3.1.1. 2" x 3" x 0.80mm thk. Metal Studs and Tracks
- 3.4.3.1.2. 9.00 mm thk. Fiber Cement Board (Smooth Paint Finish)
- 3.4.3.1.3. Fastener for Metal Framing: 5/32 x ½ Rivets
- 3.4.3.1.4. Fastener for Fiber Cement Board: 1 ½" Flat Head Black Screw
- 3.4.3.1.5. Use Wood Body Filler to cover all exposed fasteners prior to finishing works.

3.4.4. Signages

- 3.4.4.1. Proportioned lettering on 3mm thk. Clear Acrylic Glass with 4 pcs. 8mm x 17mm Stainless steel bolt screws. Font style, font size, text content shall be for approval.

3.4.5. Acoustic Wall Panel

- 3.4.5.1. Installation of 12.00 mm thk. Polyester Fiber Acoustic Panels (Dark Gray) including adhesive. Approved brand, and quality.
 - 3.4.5.1.1. 2 pcs - 0.57 m x 1.20 m Panels
 - 3.4.5.1.2. 10 pcs - 0.60 m x 1.20 m Panels
 - 3.4.5.1.3. 2 pcs - 1.20 m x 2.40 m Panels

3.4.6. Elevated Platform

3.4.6.1. Fabrication of Elevated Platform Floor:

- 3.4.6.1.1. Framing made up of 2" x 4" x 1.50 mm thk. G.I. C-Purlins and 1 ½" x 1 ½" x 4.00 mm thk. Angel Bar Framing.
- 3.4.6.1.2. 3.00 mm thk. x 180 mm x 1220 mm Vinyl Tiles (Wood Texture) on ¾" thk. Marine Plywood underlaying.
- 3.4.6.1.3. 1.50 mm thk. x 14.70 mm x 33.00 mm Matte finished Aluminum Stair Nosing (Silver/Brown Matte) fastened to marine plywood. Approved brand and quality.

3.5. PARTITIONS AND WINDOWS

3.5.1. Scope Of Work

- 3.5.1.1. The Contractor shall furnish all materials, labor, equipment, tools, and services necessary to complete all specified work as shown in the drawings.
- 3.5.1.2. Remove and replace all existing doors and windows with items specified in the plans. See the architect's approved shop drawings and details showing fabrications. Protect glass from breakage before and after installation.
- 3.5.1.3. Provide all necessary hardware to complete the work. All hardware must be approved by TSU.

3.5.2. Materials

3.5.2.1. Fixed Partitions

- 3.5.2.1.1. 12.00 mm thk. Tempered Clear Glass Partition with Top and Bottom U-Type Aluminum Channel Frame with Frameless 12.00 mm thk. Tempered Clear Glass Door (Double Swing) with Frosted Tint. Approved type/brand and quality.
- 3.5.2.1.2. All hinges shall be SS304 Top and Bottom Glass Door Patch Fitting, including Patch Lock. Approved type/brand and quality.

- 3.5.2.1.3. Door Handle shall be 32 mm Ø x 600 mm square SS304 H-Type. Approved type/brand and quality.

3.5.2.2. Operable Partition

- 3.5.2.2.1. Acoustic Class: STC 25GF
- 3.5.2.2.2. Panel Size: 55 mm thk.
- 3.5.2.2.3. Panel Trim: Imported Architectural Grade Alluminum Alloy 6063-T6
- 3.5.2.2.4. Panel Construction: 6 mm MDF
- 3.5.2.2.5. Panel Finish: 10 mm thk. Clear Tempered Glass (with Frosted Design) and Vinyl Laminate Finish Frame
- 3.5.2.2.6. Locking Seals: Bolt Locking Mechanism with Fixed Floor Receptacles
- 3.5.2.2.7. Seal Mechanism: “Tongue-and-Groove” PVC Acoustic Compression Seal
- 3.5.2.2.8. Rail Track: Imported Architectural Grade Aluminum Alloy
- 3.5.2.2.9. Panel Carrier: Imported Precision Bearing with Tires
- 3.5.2.2.10. Trail Panel: Pivoting Closure Panel

3.5.2.3. Windows

- 3.5.2.3.1. All windows shall be aluminum analog awning windows with 6.00 mm thk. One-way Reflective (Exterior) tempered bronze glass. Approved type/brand and quality.

3.5.3. Glass And Glazing

- 3.5.3.1. The glass used must conform to the types and thicknesses specified in the Schedule of Specifications and as indicated on the drawings.

3.5.4. Shop Finish

- 3.5.4.1. Unless otherwise specified in the Schedules of Specifications, all steel doors, windows, and frames are to be bonderized.

3.5.5. Dimensions

- 3.5.5.1. The Contractor must verify all dimensions of the openings as shown in the drawings at the job site before fabricating the doors and windows.

3.5.6. Execution

- 3.5.6.1. Glasses must be accurately cut to fit and have uniform bearing across the entire width of the pane. Apply a thin layer of putty to the rebate, set the glass, and press it until an even bed is achieved. Remove any excess putty from each side, ensuring it is flush with the edge of the rebate.
- 3.5.6.2. Any glass breakage occurring during execution or due to faulty installation must be replaced by the Contractor at no additional cost.

SECTION 4 – ELECTRICAL WORKS

4.1 SCOPE OF WORK

- 4.1.1 The Contractor shall provide all materials and equipment and perform all the work necessary for the complete execution of the electrical work specified herein; except as otherwise excluded, and which without excluding the generality of the foregoing, shall include but not be limited to the following principal items of work. All work shall be in

accordance with the governing codes and regulations and with the specifications, except when the same shall conflict with such codes, etc. in which case the latter shall then govern.

4.1.2 The work under this section shall include the furnishing of labor, materials, equipment, and services required to construct and install the new electrical system which includes, but is not limited to, the following items.

4.1.1.1 Provide a complete refurbished Lighting System.

4.1.1.2 Provide a complete refurbished Power and ACU System.

4.1.1.3 Provide a complete refurbished Structured Cabling System.

4.1.1.4 Re-routing of existing circuit homeruns.

- a. Lighting, power outlets, and the ACU shall be rerouted and connected to the existing or proposed panelboard, with a dedicated sub-meter installed within each room.

4.1.1.5 Provide a complete testing of all electrical systems.

- a. Ground Test
- b. Performance Test

4.1.1.6 Optional items of work.

4.1.1.7 All tapping shall be executed inside the ceiling unless indicated in the plan and on the mounting type of equipment.

4.1.1.8 If anything has been omitted in any items of work on materials usually furnished, which are necessary for the completion of the Electrical Works as outlined herein before, then such must be and are hereby included in this section of the work.

4.2 GENERAL

4.2.1 Codes, Regulations, and Ordinances

4.2.1.1 The electrical item under this contract is to be installed according to the requirements of the latest Philippines Electrical Code, the rules and regulations of the Authority concerned and the requirements of the Power Company. Nothing contained in these specifications or shown on the drawings shall be construed as to conflict with the National and Local Ordinances or Laws governing the installation of electrical work, and all laws and ordinances are hereby made part of these specifications. The Contractor is required to meet the requirements thereof.

4.2.2 Plans and Drawings

4.2.2.1 The Contract Drawings, which constitute an integral part of this contract, shall serve as workings drawings. They indicate the general layout of the complete electrical system and show arrangements of feeders, circuits, outlets, switches, control panel boards, service equipment, fixtures, and other works.

4.2.2.2 The Contractor shall check architectural, structural, and plumbing plans to avoid possible installation conflicts. Should drastically changes from original plans be necessary to resolve such conflicts, the Contractor shall notify the Engineer/Architect and shall secure from him written approval and agreement concerning necessary changes and adjustments before altered installation work is started.

4.2.3 Minor Modifications

- 4.2.3.1 The plans as drawn are based upon architectural plans and details show conditions as accurately as is possible to indicate them in scale. The plans are diagrammatical and do not necessarily show all fittings, etc., necessary to fit the conditions. The locations of lighting fixtures and switches shown on the plans are approximate. The Contractor shall be responsible for the proper location to make them fit with architectural details

4.2.4 Guarantees

- 4.2.4.1 The Contractor shall guarantee that the electrical system is free from all grounds and all defective workmanship and materials and will remain so for a period of one (1) year from the date of acceptance of the work. Any defects, appearing within the aforesaid period, shall be remedied by the Contractor at his own expense.
- 4.2.4.2 The Contractor shall indemnify and save harmless the TSU and his duly authorized representative from and against all liability for damages arising from injuries or disabilities to persons or damage to property occasioned by any act or omission of the Contractor, including all expenses, legal or other, which may be incurred by the TSU in the defense of any claim, action, or suit.

4.2.5 Samples and Drawings

- 4.2.5.1 The Contractor shall submit to the Engineer/Architect for approval samples of fixtures, conduit, wire, wiring devices, finished plates and of any item as may be required by the Engineer/Architect.
- 4.2.5.2 Prepare and submit for approval shop drawings or catalogs of equipment appliances and fixtures.

4.3 INSTALLATION REQUIREMENTS

- 4.3.1 All materials shall be new and shall conform to the standards specified in the Philippine Electrical Codes and others such as IEEE and NEMA, for every case where such standard has been established for the particular type of materials in question.
- 4.3.2 All materials on all systems shall comply with the following specifications unless specifically accepted, and all materials that were not specified shall be of the best of their respective kind.
- 4.3.3 Cutting and Fitting
 - 4.3.3.1 The contractor shall do all cutting and fitting required for the installation of the electrical items and coordinate with the work of other trades, in accordance with the drawings and in a manner satisfactory to the Engineer/Architect.
- 4.3.4 Inserts, Anchor, Etc.
 - 4.3.4.1 Furnish to the proper trades all inserts, anchors or other required items, which are to be built in by them for securing all hangers or other supports of conduit and for anchorages for electrical equipment.
- 4.3.5 Ground Tests
 - 4.3.5.1 The entire installation shall be free from improper grounds and from short circuits.
 - 4.3.5.2 Ground testing shall be performed and shall meet the standard resistance required by the NFPA, IEEE and PEC.

4.3.6 Performance Test

- 4.3.7.1 It shall be the responsibility of the Contractor to test all systems of the entire electrical installation for proper operational conditions. These conditions shall apply to the power and lighting installations as well as the fire alarm system and motors.

4.4 MATERIALS

4.4.1 Wires and Cables

- 4.4.1.1 The installation shall be free from improper grounds and short circuits. All wires shall be copper, soft-drawn, and annealed, shall be of 98% conductivity, shall be smooth and fine and of a cylindrical form, and shall be within 1% of the actual size called for.

- 4.4.1.2 Wires shall be color coded as follows:

Line 1 --- Black Line 2 --- Red Ground --- Green

- 4.4.1.3 All wires and cables for lighting and power system shall be moisture and heat resistant rubber or thermoplastic insulate. It must be in conformity with the Philippine Electrical Code when used in damp or unit location. Wires shall be stranded for sizes #12 AWG.

- 4.4.1.4 All wires and cables shall comply with the requirements as to the particular usage and approved brand.

4.4.2 Pipes

- 4.4.2.1 Wiring shall be done in PVC Pipe for embedded and in RSC or EMT for run exposed; it shall be Schedule 40.
- 4.4.2.2 No tubing shall be used in any system smaller than ½” electric trade size, nor shall have more than four 90-degree bends in any one run and where necessary pull, boxes shall be provided as directed.
- 4.4.2.3 No wire shall be pulled into any conduit until the conduit system is complete in all details and in the case of concealed work until all rough plastering or masonry has been completed in every detail.
- 4.4.2.4 The ends of all conduits shall be tightly plugged to exclude plaster, dust, and moisture while the building is in the process of construction. All conduit ends shall be reamed to remove all burrs.

4.4.3 Junction And Pull Boxes

- 4.4.3.1 PVC Junction and pull boxes shall be provided as indicated or as required for facilitating and pulling of wire and cables. Pull boxes in finished places shall be located and installed with the permission and to the satisfaction of the contracting officer.

4.5 LIGHTING SYSTEM

- 4.5.1 Install all new lighting fixtures as specified or at locations shown in plans or as directed by the Engineer/Architect.



- 2 – 18 Watts T8 LED tube light (daylight)
- Troffer Fixture with Louver Aluminum Reflector
- Surface Mounted



- 3 Watts LED Ceiling Mounted Emergency Light
- Recessed Mounted



- 16’’ Blade Orbit Fan
- Plastic Blade
- 4-Speed Remote Switch

4.5.2 Wall switches shall be rated at 15 amperes, 250 volts, one way or as required. Switches shall be of quiet and automatic action type, silver contact, feather touch operation, and white.



- Two-gang Switch
- Wide Series with LED
- One way

- 250V, 15A

4.6 POWER AND AIR-CONDITION SYSTEM

- 4.6.1 Receptacles outlet shall be for flush mounted duplex universal outlet rated at 15 amperes, 250 volts.



- Duplex Universal Outlet with Ground
- Flush mounted
- 250V, 15A

- 4.6.2 Install all outlets as specified or at locations shown in plans or as directed by the Engineer/Architect.

- 4.6.3 PB-314 shall be a NEMA 1–type enclosure, recessed-mounted, bolt-on panelboard with eight (4) branches, one (1) spare, and a center main. Refer to the plans for additional details.

- 4.6.4 Electric Sub-meter shall be 240V, single phase, 60A, and 6-digit register.



- Analog Electric Sub-meter
- 240V, 1P, 10(60)A

- 4.6.5 NEMA-3R Enclosure shall be used outdoor for the supply of Split type Air-condition Unit. refer to the plan for the actual location and elevation of NEMA-3R.



- NEMA-3R Enclosure
- With 30AT, 2P, MCCB Bolt-on
- Surface Mounted, Weatherproof

4.7 AUXILIARY SYSTEM

- 4.7.1 Category 6 UTP Cable (CAT6) shall be 4 pairs, solid strands, and bare copper material.
- 4.7.2 3/4" dia. PVC pipe with G.I. wire inside shall be installed as a conduit for installation of Category 6 cables.
- 4.7.3 1-Gang wall mounted CAT6 Data Outlet shall be installed in reference to location shown in the plan.
- 4.7.4 All empty or without cover utility boxes shall be covered with blank plates.
- 4.7.5 4U Data Cabinet shall be installed in room 314 and 316 in the proposed location of PoE Switch.



- 1-Gang wall mounted CAT6 data outlet
- 2-Gang (PC+C.O.) floor mounted outlet
- RJ45 Port



- HDMI Outlet
- HDMI Cable (3m)



- 4U Wall Mounted Data Cabinet
- 550x350x250mm

4.8 CONSUMABLE HARDWARE / FITTINGS

- 4.8.1 PVC Cement, G.I. wires, brackets, electrical tape, tox screw, paint, and other small value materials needed to execute layouts and termination of electrical works shall be considered as consumable hardware.

4.8.2 Junction box, pullbox, Utility box, adaptor, locknut, coupling, unistrat channel, unistrat strap, full thread round rod, expansion/anchor bolt, bolts, nuts, washer, etc. and other small value materials needed to execute layouts and termination of electrical works shall be considered as Fittings.

SECTION 5 – MECHANICAL WORKS

5.1CONDENSATE DRAIN PIPE

5.1.1 Scope of Work

5.1.1.1 This specification covers the materials, and labor including necessary services to complete the installation of the condensate drain pipe.

5.1.2 Material


5.1.2.1 Pipes and Fittings

- 5.1.2.1.1 Pipes shall be 25mm Ø PVC Blue Pipe.
- 5.1.2.1.2 Pipe must comply with Philippine National Standards (PNS) or equivalent for PVC pipes.

SECTION 6 – SUPPLY, DELIVERY, AND INSTALLATION OF OFFICE FURNITURE, APPLIANCES, AND AIR CONDITIONING UNITS

6.1 OFFICE FURNITURE AND APPLIANCES

- 6.1.1 BLINDS: Venetian Duo/Combi Roller Blinds, Brown, Size: 1.80 m width/70 inches, Window Size: 70 inches W x 47 inches H
- 6.1.2 BLINDS: Venetian Duo/Combi Roller Blinds, Brown, Size: 1.20 m width/47 inches, Window Size: 94 inches W x 47 inches H
- 6.1.3 OFFICE CUBICLES: Low Partition U-Shaped Table with wooden mobile pedestal, CPU Rack and Grommet; Size: 120 cm L x 60 cm W; Panel: Fabric with Glass (Stripe Frosted Sticker); Panel Thickness: 4.68-5.00 cm; Metal frame color: Charcoal Gray

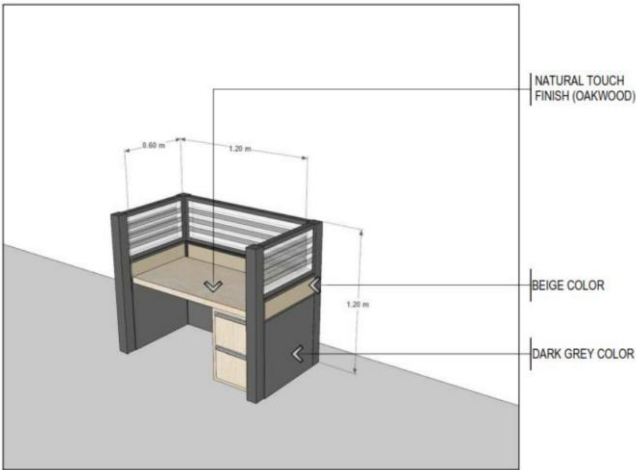

- 6.1.4 CHAIR: Swivel Junior Executive; Ergonomic Swivel; Color: Black; Backrest: Mesh; With arm rest; Chrome Leg



- 6.1.5 CHAIR: For Conference, Leather Visitor Chair; Chrome Plated Frame; Upholstered in Polyurethane (PU) leather; Padded armrest; Color: Black; Chair Back Height: Mid-back; Size: L 54cm x W 47cm x H 84cm



- 6.1.6 TABLES AND CHAIRS: For Students, Table Dimension : Height; 710 (+10), Length: 600 , Width; 400. Chair Dimension : Seat Height; 412 (+10), Seat Depth ; 380 (+10), Seat Width; 370 (+10), Back Height; 800 (+10) Back Width ; 410 (+10). Chair Features: High Density Polyethylene Blow molded plastic seat and back, Color: Pantone 4665c; Metal/ Steel Tubular legs; Table Features: 18.00 mm thk. High Pressure Laminated Table Top, Round corner with 1.00 mm thk. PVC Edging, 4.00 mm thk. x 50 mm x 50 mm Metal Wire Mesh Shelf, Metal/steel Tubular legs, Adjustable Leveler 38 mm ø Plastic Base, Color: pantone 4665c.



- 6.1.7 TABLE: For Instructor, Free Standing Table; Dimension: 120 cm L x 60 cm W x 75 cm H; 1” thk. Laminated MDF Table top, Color: Cherry (Brown); Powder Coated Metal Frame Legs with front panel for privacy, Color: Black



- 6.1.8 TABLE: For Conference, 8-seater Rectangular Table; Dimension: 180 cm L x 85 cm W x 76 cm H; 6.00 cm thk. High Pressure Laminated Wooden Table Top; Black Metal Tubular Legs



- 6.1.9 CABINET: Filing, 4-Drawer Lateral File Cabinet, with 2 Adjustable Hanging Bars (each drawer) for Folders, Ball Bearing Slide Drawers, Anti-tilt locking mechanism, Built-in Lock with 2 Keys - 1 lock secures all drawers, Recessed Plastic Handles, Material: Steel Metal Gauge 24, Color: Powder Coated Light Gray, Dimension: L - 900 mm, W- 450 mm, H - 1380 mm



- 6.1.10 CABINET: Filing, 2-Drawer Lateral File Cabinet, with 2 Adjustable Hanging Bars (each drawer) for Folders, Ball Bearing Slide Drawers, Anti-tilt locking mechanism, Built-in Lock with 2 Keys - 1 lock secures all drawers, Recessed Plastic Handles, Material: Steel Metal Gauge 24, Color: Powder Coated Light Gray, Dimension: L - 900 mm, W- 450 mm, H - 750 mm



- 6.1.11 SHELF: Wide Book Shelves Cabinet, 5-Layers (Lower Layer-Cabinet, 4-upper layer shelves), Material: Panel - Cold Rolled Steel Sheet, Frames - Metal tube in powder coated finish, Color: Black, Weight Capacity: 110 kgs (Top and Shelf), Size: W - 800 mm, D - 400 mm, H - 1800 mm



- 6.1.12 SHELF: Narrow Book Shelves Cabinet, 5-Layers (Lower Layer-Cabinet, 4-upper layer shelves), Material: Panel - Cold Rolled Steel Sheet, Frames - Metal tube in powder coated finish, Color: Black, Weight Capacity: 10 kgs (Top and Shelf), Size: W - 400 mm, D - 400 mm, H - 1800 mm



6.1.13 STANCHION POST: Retractable Belt Stanchion Post, Stainless Steel – Silver pole and Stand, Belt Color – Red, Belt – 5cm Wide x 2 meters Length, Column Diameter – 63 mm, Height: 90 cm, Stainless steel pipe wall thickened by 0.80mm, Base: Plastic Galvanized iron sheet base, base weight: 5KG. Overall Weight: 7KG



6.1.14 INTERACTIVE DISPLAY (FIXED AND MOVABLE):



6.1.14.1 Display

- 6.1.14.1.1 Screen Size: 65 inches (diagonal)
- 6.1.14.1.2 Backlight: LED
- 6.1.14.1.3 Aspect ratio: 16:9
- 6.1.14.1.4 Maximum display resolution: 4K UHD (3840 × 2160)
- 6.1.14.1.5 Refresh rate: 60 Hz
- 6.1.14.1.6 Lifespan: $\geq 50,000$ hours
- 6.1.14.1.7 Brightness: 400 cd/m²
- 6.1.14.1.8 Display response time: ≤ 8 ms
- 6.1.14.1.9 Viewing angle: 178°
- 6.1.14.1.10 Glass: Full heat-tempered | Anti-glare | Anti-fingerprint | Bonded
- 6.1.14.1.11 Frame color: White
- 6.1.14.1.12 Convenience buttons: Power | Home | Volume | Input select | Screen shade | Freeze frame
- 6.1.14.1.13 Sensors: Proximity | Ambient light | Infrared
- 6.1.14.1.14 Audio: 2 integrated 20 W speakers Integrated linear six-microphone array with support for onboard acoustic echo cancellation

- 6.1.14.1.15 NFC: Integrated RFID NFC reader/writer; CCID (chip card interface device) when used with a native operating system driver for Windows®, Linux®, or Mac; Supported protocols: ISO 14443A/B, ISO 15693, NFC Tag 1-4
- 6.1.14.2 Interactive Experience
 - 6.1.14.2.1 Touch technology: HyPr Touch™ with Advanced IR
 - 6.1.14.2.2 Touch features: Simultaneous tool differentiation, Object Awareness™, Silktouch™
 - 6.1.14.2.3 Typical touch response time: ≤ 5 ms
 - 6.1.14.2.4 Frame rate: ≥ 200 Hz
 - 6.1.14.2.5 Accuracy: 1 mm
 - 6.1.14.2.6 Minimum object size: 2 mm
 - 6.1.14.2.7 Multitouch capabilities: Up to 50 touch points (OS dependent)
 - 6.1.14.2.8 Tools included: Pens (×2)
 - 6.1.14.2.9 Tool holders: Magnetic | Frame-mounted
- 6.1.14.3 Software
 - 6.1.14.3.1 iQ embedded Android OS
 - 6.1.14.3.1.1. Operating System: Android version 13.0 Supports an automatic update to Android 15
 - 6.1.14.3.1.2. CPU: Octa-core
 - 6.1.14.3.1.3. Memory: 8 GB DDR\$
 - 6.1.14.3.1.4. OS Architecture: 64-bit
 - 6.1.14.3.1.5. Storage: 64 GB (up to 576GB)
 - 6.1.14.3.1.6. Supports: Digital Whiteboard, Web Browser, Screen Sharing, Play Store Protect, Play Store, Ability to run third-party applications, Cloud Storage Access
 - 6.1.14.3.1.7. Other features: Personalized home screen and settings Input select Split screen Picture-in-picture (PIP) with touch pass-through Interactive widgets Templates, graphic organizers, and manipulatives File and app libraries
- 6.1.14.4 Inputs
 - 6.1.14.4.1 OPS PC accessory slot
 - 6.1.14.4.2 microSD slot with security cover
 - 6.1.14.4.3 HDMI® 2.1 4K @ 60Hz with HDCP 1.4, HDCP 2.3, ARC, and eARC support
 - 6.1.14.4.4 VGA video
 - 6.1.14.4.5 Stereo 3.5 mm (variable)
 - 6.1.14.4.6 RS-232 (DB-9 connector)
 - 6.1.14.4.7 RJ45 (LAN In)
 - 6.1.14.4.8 USB Type-C 4K @ 60Hz Display Port 1.2, HDCP 2.3 and HDCP 1.3, USB 2.0 (UFP) for touch and digital audio, USB 3.2 Gen 1 (DFP) for peripherals; 27 W power delivery
 - 6.1.14.4.9 USB Type-C, 4K @ 60Hz, Display Port 1.2, USB 2.0 (UFP) for touch and digital audio, USB 3.2 Gen 1 (DFP) for peripherals; 65W power delivery
 - 6.1.14.4.10 USB 2.0 Type-A
 - 6.1.14.4.11 USB 3.2 Gen 1 Type-A
 - 6.1.14.4.12 USB 3.2 Gen 1 Type-B
- 6.1.14.5 Outputs
 - 6.1.14.5.1 HDMI 2.1 4K @ 60Hz with HDCP 2.3 support
 - 6.1.14.5.2 USB Type-C 4K @ 60Hz Display Port 1.4a, HDCP 2.3 and HDCP 1.3, USB 3.2 Gen 1 (DFP) for touch ingest and peripherals; 4.5 W power delivery

- 6.1.14.5.3 Stereo 3.5 mm (variable)
- 6.1.14.5.4 S/PDIF optical (fixed)
- 6.1.14.5.5 RJ45 (LAN Out)

6.1.14.6 Connectivity

- 6.1.14.6.1 Wired: RJ45 (×2) 1000BASE-T
- 6.1.14.6.2 Wi-Fi: IEEE 802.11ax (Wi-Fi 6e) supporting WPA, WPA2, WPA3 PSK, and 802.1X EAP authentication protocols
- 6.1.14.6.3 Bluetooth: 5.2 dual mode

6.1.14.7 Included cables and accessories

- 6.1.14.7.1 Country-specific power cable: 16' 5" (5 m) USB 2.0 A to B cable, 6' (1.8 m) USB 3.2 Gen 1 Type-C cable, 5A; Pens; External tri-band Wi-Fi (2.4, 5, and 6-7.2 GHz) and Bluetooth® (2.4 GHz) antennas; Remote control with AAA batteries; Illustrated installation instructions; Important information document

6.1.14.8 Storage, Operating requirements, and Power Consumption

- 6.1.14.8.1 Power requirements: 100V to 240V AC, 50 Hz to 60 Hz
- 6.1.14.8.2 Operating temperature: 41–95°F (5–35°C)
- 6.1.14.8.3 Storage temperature: -4–140°F (-20–60°C)
- 6.1.14.8.4 Humidity: 5–80% relative humidity, non-condensing
- 6.1.14.8.5 Power Consumption:
 - 6.1.14.8.5.1 Typical: 90 W
 - 6.1.14.8.5.2 Standby: 0.2 W

6.1.14.9 Physical Dimensions & Mounting:


- 6.1.14.9.1 Dimensions (W x H x D): 150.7 cm x 92.8 cm x 8.9 cm
- 6.1.14.9.2 Weight: 89 lb. (40 kg)
- 6.1.14.9.3 Mount: VESA M8 | 600 x 400 mm
- 6.1.14.9.4 Handles: 2

6.1.14.10 Warranty


- 6.1.14.10.1 3-years manufacturer’s warranty

6.1.14.11 Additional Accessories:

- 6.1.14.11.1 WALL MOUNT, For Fixed Interactive Display: Weight: 9lb. 4 oz. (4.2 kg); Maximum Supported Interactive Display weight: 220 lb. (100 kg); Dimensions (W x H x D): 91 cm x 26 cm x 3.7 cm; Compatible with VESA Mounting hole patterns: 200 mm x 200 mm to 800 mm x 600 mm. With 1-year limited equipment Warranty



6.1.14.11.2 HEAVY DUTY MOBILE STAND, For Movable/Mobile Interactive Display: Color - Black, Vertical height settings - 58 7/8" (149.4 cm); 55 1/4" (140.4 cm); & 51 3/4" (131.4 cm), Maximum display weight capacity: 265 lb. (120 kg), Maximum stand weight capacity: 297 lb. (135 kg), Wheels: 4" industrial-grade locking casters, Included hardware: Computer mounting bracket (VESA 100 × 100 mm); With 5-year limited equipment warranty

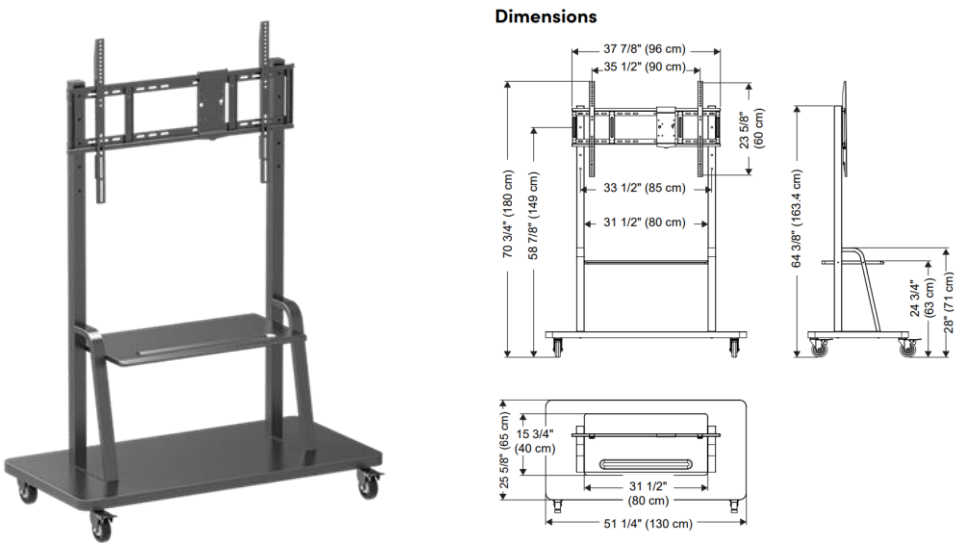

6.1.15 TELEVISION



- 6.1.15.1 Display: 55-inch QLED 4K (Resolution)
- 6.1.15.2 Picture Processor: Q4 AI Processor
- 6.1.15.3 Color & HDR: Quantum Dot (100% Colour Volume), Quantum HDR, HDR 10+ Support, PANTONE Validated
- 6.1.15.4 Motion: Motion Xcelerator (50Hz-60Hz native)
- 6.1.15.5 Gaming: AI Auto Game Mode, Game Bar (21:9 & 32:9 support)
- 6.1.15.6 Smart TV OS: Tizen OS (7 years OS upgrades)
- 6.1.15.7 Audio: Adaptive Sound, Object Tracking Sound (OTS Lite)
- 6.1.15.8 Connectivity: Wi-Fi, Ethernet LAN, Bluetooth, HDMI (ARC Support), USB
- 6.1.15.9 Dimensions (WxHxD): 1234.1 x 710.8 x 60.3 mm
- 6.1.15.10 VESA Mounting: 200 x 200 mm
- 6.1.15.11 Power Supply: AC100-240V~ 50/60Hz
- 6.1.15.12 Power Consumption: 135 W (Maximum); 84 W (Typical); 0.5 W (Standby)
- 6.1.15.13 Accessories: Remote Contol, Power Cable, Webcam Support, Full Motion Slim Wall Mount, Slim Fit Wall-mount Support, Dongle Support, User Manual
- 6.1.15.14 Warranty: 1 year for parts and labor, 6 months for accessories (remote control, wall mount, QLED TV stands and invisible connection cable)

6.2 AIR CONDITIONING UNITS

6.2.1 1.5 HP Split Type: Wall-Mounted Inverter

6.2.1.1 General Specification

6.2.1.1.1 Cooling Capacity Max (14,000 BTU/hr) | Cooling Capacity Rated/Min BTU/hr (11,900/4,100) | COP 4.43 | CSPF 6.68 | DOE Star Rating 5 | Indoor/Outdoor H:300mm/550mm,W: 920mm/675mm, D:240mm/284mm Weight: 13/27 kg | Refrigerant: Type R32, Charge 0.77kg | Compressor: Hermetically Sealed Swing Type | Air Flow Rate:H/M/L/Q (CFM) 780/600/455/357 | Rated Input Voltage(230V,60 Hz, 1ph).

6.2.1.2 Key Features

6.2.1.2.1 Power Airflow Dual Flaps, Wide Angle Louvers, Vertical and Horizontal Auto-Swing, 3D Airflow, Coanda Effect, Auto Fan Speed, Intelligent Eye, Two-Area Intelligent Eye, Dehumidifier, Fan Operation, Inverter Powerful Operation, Econo Mode, Indoor Unit On/Off Switch, Wireless Remote Controller, Streamer Technology, Deodorizing Enzyme Blue Filter, Saranel Filter, Wipe-Clean Panel, Mold-Proof Operation, Removable Drain Pan, Weekly Timer, 24 Hour On/Off Timer, Count Up-Down On/Off Timer, Night Set Mode/Sleep mode Auto-Restart after Power Failure, Self-Diagnosis with Remote Controller, Anti-Corrosion Treatment of OD HEX fin, Auto Voltage Guard - Super PCB, Wireless, Wireless LAN Adaptor (built-in).

6.2.1.3 Warranty

6.2.1.3.1 Compressor: 10 Year Compressor
6.2.1.3.2 Parts & Service: 1 Year
6.2.1.3.3 Free Cleaning (Included During Warranty Period): At least 1 service

6.2.1.4 Installation

6.2.1.4.1 Provide PVC cladding/molding for exposed copper tubes.
6.2.1.4.2 Provide additional copper 20 ft tubing beyond the included 10 ft

6.2.2 2.0 HP Split Type: Wall-Mounted Inverter

6.2.2.1 General Specification

6.2.2.1.1 Cooling Capacity Max (21,200BTU/hr) | Cooling Capacity Rated/Min BTU/hr(17,700/4,100) | COP 3.94 | CSPF 6.69 | DOE Star Rating 5 | Indoor/Outdoor H: 300mm/595mm,W: 1100mm/845mm, D:240mm/300mm Weight: 15/34 kg | Refrigerant: Type R32, Charge 0.6kg | Compressor: Hermetically Sealed Swing Type | Air Flow Rate: H/M/L/Q (CFM) 636/516/424/339 | Rated Input Voltage(230V,60 Hz, 1ph)

6.2.2.2 Key Features

6.2.2.2.1 Power Airflow Dual Flaps, Wide Angle Louvers, Vertical and Horizontal Auto-Swing, 3D Airflow, Coanda Effect, Auto Fan Speed, Intelligent Eye, Two-Area Intelligent Eye, Dehumidifier, Fan Operation, Inverter Powerful Operation, Econo Mode, Indoor Unit On/Off Switch, Wireless Remote Controller, Streamer Technology, Deodorizing Enzyme Blue Filter, Saranel

Filter, Wipe-Clean Panel, Mold-Proof Operation, Removable Drain Pan, Weekly Timer, 24 Hour On/Off Timer, Count Up-Down On/Off Timer, Night Set Mode/Sleep mode Auto-Restart after Power Failure, Self-Diagnosis with Remote Controller, Anti-Corrosion Treatment of OD HEX fin, Auto Voltage Guard - Super PCB, Wireless, Wireless LAN Adaptor (built-in).

6.2.2.3 Warranty

- 6.2.2.3.1 Compressor: 10 Year Compressor
- 6.2.2.3.2 Parts & Service: 1 Year
- 6.2.2.3.3 Free Cleaning (Included During Warranty Period): At least 1 service

6.2.2.4 Installation

- 6.2.2.4.1 Provide PVC cladding/molding for exposed copper tubes.
- 6.2.2.4.2 Provide additional copper 20 ft tubing beyond the included 10 ft.

6.2.3 3.0 HP Split Type: Wall-Mounted Inverter

6.2.3.1 General Specification

- 6.2.3.1.1 Cooling Capacity Max (21,200BTU/hr) | Cooling Capacity Rated/Min BTU/hr(17,700/4,100) | COP 3.94 | CSPF 6.69 | DOE Star Rating 5 | Indoor/Outdoor H: 300mm/595mm,W: 1100mm/845mm, D:240mm/300mmWeight: 15/34 kg | Refrigerant: Type R32, Charge 0.6kg | Compressor: Hermetically Sealed Swing Type | Air Flow Rate: H/M/L/Q (CFM) 636/516/424/339 | Rated Input Voltage(230V,60 Hz, 1ph)

6.2.3.2 Key Features

- 6.2.3.2.1 Power Airflow Dual Flaps, Wide Angle Louvers, Vertical Auto-Swing, Horizontal Auto-Swing, 3D Airflow, Comfort Airflow Mode, Auto Fan Speed, Indoor Unit Quiet Operation, Outdoor Unit Quiet Operation, Intelligent Eye, Hybrid Dehumidifier, Econo Mode, Deodorizing Enzyme Blue Filter, Saranet Filter, Wipe-clean panel, Mold-Proof Operation, Removable Drain Pan, Weekly Timer, 24 Hour On/Off Timer, Auto Restart after Power Failure, Self-Diagnosis with Remote Controller, Anti-corrosion Treatment of OD HEX fin, All Voltage Guard - Super PCB, Wireless, Wire Land Adaptor

6.2.3.3 Warranty

- 6.2.3.3.1 Compressor: 10 Year Compressor
- 6.2.3.3.2 Parts & Service: 1 Year
- 6.2.3.3.3 Free Cleaning (Included During Warranty Period): At least 1 service

6.2.3.4 Installation

- 6.2.3.4.1 Provide PVC cladding/molding for exposed copper tubes.
- 6.2.3.4.2 Provide additional copper 20 ft tubing beyond the included 10 ft.

Section VII. Drawings

Please refer to the PDF file named “Drawings” in the folder “**Refurbishment of TSU Hotel Rooms 314, 316 & 318 for the College of Medicine**” at the TSU website:
<https://www.tsu.edu.ph/opportunities/bid-opportunities/2026-bid-opportunities/>

Section VIII. Bill of Quantities

1. General

- 1.1. The Bill of Quantities (BOQ) shall be read and construed in conjunction with the Conditions of Contract, Specifications, and Drawings and the Bidder shall provide the prices for the full scope of the work covered by the Contract. No claim for variations shall be considered on account of the Bidder’s failure to comply with this provision.
- 1.2. Although the BOQ was prepared with due diligence, all quantities given therein shall be deemed to be estimated quantities and are not guaranteed to be actual and correct. The Bidder shall be deemed to have checked and verified the quantities in the preparation of his/her Bid. Any claim whatsoever for any positive variation in the actual quantities furnished versus the BOQ shall not be accepted, unless stipulated elsewhere in the Contract. Upon award of the Contract, the priced BOQ shall be used solely forevaluating work accomplishment payments due to the Contactor.
- 1.3. The Bidder shall check that each copy of the BOQ is complete in the number of pages and in the reproduction of each page.
- 1.4. The descriptions in the Bill of Quantities may not be complete and the Bidder must refer to the Specifications and Drawings.
- 1.5. The Bidder shall not change any description or specification, and remove or omit any of the item, or part of any of the item of the BOQ without the proper notification of the authorized person of TSU.
- 1.6. Prices shall be given in Philippine Peso taken to two decimal places. A comma shall be used to separate triple digits and a point or dot to separate the decimal portion (e.g., 1,355,076.45)
- 1.7. Identical work items occurring in separate sections shall not be priced at different rates, unless it is the deliberate intention.

2. Units

Symbol	Unit	Description
lot	lot	Although not a standard unit of measure, in this BOQ it shall be construed as a collection of all the materials (accessory, fitting, fixture, consumable, etc.) required for a particular scope of work
m ²	square meter	Area; it shall be construed as the coverage area or surface area
m ³	cubic meter	Volume
pc	piece	Used for discrete or countable materials
set	set	Although not a standard unit of measure, in this BOQ it shall be construed as the complete set of the major material component and its auxiliaries or accessories to be operational or functional

3. Rates

Rates and Prices shall be all inclusive, comprehensive, and include the following:

- 3.1. All obligations imposed by the Contract,
- 3.2. Complying in every respect with the requirements and the considerations of the Specifications and Drawings,
- 3.3. Labor for all scope of works and all associated costs,
- 3.4. Materials and goods and all associated costs,
- 3.5. Use of equipment and tools,
- 3.6. Any additional labor usually associated with measured items.
- 3.7. All necessary protection of the Works and removal of all temporary coverings and supports,
- 3.8. All utilities such as electricity, water, etc.,
- 3.9. Repair works on all damaged portions affected by the Works,
- 3.10. Cleaning of site, cleaning, and hauling of debris,
- 3.11. All safety and health aspects of the Works,
- 3.12. All required materials tests and its associated costs,
- 3.13. All applicable taxes, duties, charges, and relevant permits,
- 3.14. Overhead & profit.

4. Bidder's Priced Bill of Quantities

2. The Bidder shall present the detailed breakdown of the **Bid Price** using the form **Bill of Quantities** in PDF format which should be downloaded from the File Folder "**Refurbishment of TSU Hotel Rooms 314, 316 & 318 for the College of Medicine**", from the TSU website: <https://www.tsu.edu.ph/opportunities/bid-opportunities/2026-bid-opportunities/>
- 4.1. The Bidder shall provide the following information or data in the spaces provided
 - 4.1.1. *[Bidder's Letterhead]*,
 - 4.1.2. *[Date]*,
 - 4.1.3. *[Signature]*,
 - 4.1.4. *[Name of Authorized Signatory]*, and
 - 4.1.5. *[Title/Position of Authorized Signatory]*.
- 4.2. The contents of the following columns shall not be altered or removed: Column Heading (column number)
 - 4.2.1. **Item No. (1)**,
 - 4.2.2. **Work Description (2)**

4.2.3. **Quantity. (5)**, and

4.2.4. **Unit (6)**.

4.3. For the rows with entries in the columns **5** and **6**, the Bidder shall provide the following prices, in Philippine peso, in the appropriate columns: Column Heading (column number)

4.3.1. **Direct Cost (7)** – the aggregate cost of materials, labor, and equipment utilization,

4.3.2. **Indirect Cost (8)** – the sum of overhead cost, contingency, miscellaneous, and profit,

4.3.3. **Total Direct & Indirect Cost (9)** – the sum of the values in columns **(7)** and **(8)**,

4.3.4. **Value Added Tax (10)** – the tax to be charged for the work item,

4.3.5. **Total Cost (11)** – the sum of the values in columns **(9)**, and **(10)**, and

4.4. The Sub-Total for every work cluster shall be the sum of all priced items included in that section.

4.5. The Total Bid Price shall be the sum of all the total cost for the priced work items and shall be stated in words and figures in the spaces provided at the bottom row of the table.

4.6. The Bid shall be deemed “**non-responsive**” if a price is required for a work item, but no price is indicated. Placing a zero (0) or a dash (-) in the cells that requires prices shall be interpreted to mean that the work item is being offered at no cost or for free by the Bidder.

4.7. The printed Priced BOQ shall be duly signed and all pages must bear the signature or initial of the authorized signatory of the Bidder.

5. Detailed Estimate

3. The specific costs (Material, Labor & Equipment, etc.) for the work items in the Priced BOQ shall be obtained from the detailed estimates using the form for **Detailed Unit Price Analysis**, in PDF format which should be downloaded from the File Folder “**Refurbishment of TSU Hotel Rooms 314, 316 & 318 for the College of Medicine**” with the file name “**DUPA**”, from the TSU website: <https://www.tsu.edu.ph/opportunities/bid-opportunities/2026-bid-opportunities/>

5.1. The unit Man-Days used in the DUPA shall mean the number of days for one man to complete the task or for the number of men required to complete the task in one day (e.g., 8 Man-Days = 1 Man x 8 Days = 2 Men x 4 Days = 4 Men x 2 Days = 8 Men x 1 Day).

6. Bidder’s Responsibility

6.1. It shall be the responsibility of the Bidder to verify that the unit and quantity indicated in the DUPA for a particular work item are the same as those in the Bill of Quantities for the same work item.

Section IX. Checklist of Technical and Financial Documents

This Checklist of Technical and Financial Documents is provided to guide the Bidder in preparing his/her bid. The checklist may be used by the Bidder to verify if the Bid includes all the prescribed documents.

The Bidder, in submitting the required documents, must use the prescribed forms found in Section X. Bidding Forms. However, should a bidder choose to use a different formatting style for a required document, the bidder must ensure that the substance in the form given in Section X for that particular document is substantially captured in the equivalent document.

I. TECHNICAL COMPONENT ENVELOPE

Class “A” Documents

Legal Documents

- ☐ (a) Valid PhilGEPS Registration Certificate (Platinum Membership) (all pages) in accordance with Section 8.5.2 of the IRR;

Technical Documents

- ☐ (b) Statement of the prospective bidder of all its ongoing government and private contracts, including contracts awarded but not yet started, if any, whether similar or not similar in nature and complexity to the contract to be bid; and
- ☐ (c) Statement of the bidder’s Single Largest Completed Contract (SLCC) similar to the contract to be bid, except under conditions provided under the rules; and
- ☐ (d) Special PCAB License in case of Joint Ventures and registration for the type and cost of the contract to be bid; and
- ☐ (e) Original copy of Bid Security. If in the form of a Surety Bond, submit also a certification issued by the Insurance Commission or original copy of Notarized Bid Securing Declaration; and
- ☐ (f) Project Requirements, which shall include the following:
 - ☐ a. Organizational chart for the contract to be bid;
 - ☐ b. List of contractor’s key personnel (*e.g.*, Project Manager, Project Engineers, Materials Engineers, and Foremen), to be assigned to the contract to be bid, with their complete qualification and experience data;
 - ☐ c. List of contractor’s major equipment units, which are owned, leased, and/or under purchase agreements, supported by proof of ownership or certification of availability of equipment from the equipment lessor/vendor for the duration of the project, as the case may be; and
- ☐ (g) Original duly signed Omnibus Sworn Statement (OSS) and if applicable, Original Notarized Secretary’s Certificate in case of a corporation, partnership, or cooperative; or Original Special Power of Attorney of all members of the joint venture giving full power and authority to its officer to sign the OSS and do acts to represent the Bidder.

Financial Documents

- ☐ (h) The bidder’s computation of Net Financial Contracting Capacity (NFCC).

Class “B” Documents

- ☐ (i) If applicable, duly signed joint venture agreement (JVA) in accordance with RA No. 4566 and its IRR in case the joint venture is already in existence or duly notarized statements from all the potential joint venture partners stating that they will enter into and abide by the provisions of the JVA in the instance that the bid is successful.

II. FINANCIAL COMPONENT ENVELOPE

- ☐ (j) Original of duly signed and accomplished Financial Bid Form; and

Other documentary requirements under RA No. 9184

- ☐ (k) Original of duly signed Bid Prices in the Bill of Quantities; and
- ☐ (l) Duly accomplished Detailed Estimates Form, including a summary sheet indicating the unit prices of construction materials, labor rates, and equipment rentals used in coming up with the Bid; and
- ☐ (m) Cash Flow by Quarter.

Section X. Bidding Forms

TABLE OF CONTENTS

I. Eligibility and Technical Documents		
b.	Statement of the prospective bidder of all its ongoing government and private contracts, including contracts awarded but not yet started, if any, whether similar or not similar in nature and complexity to the contract to be bid;	46
c.	Statement of the bidder's Single Largest Completed Contract (SLCC) similar to the contract to be bid, except under conditions provided under the rules	47
e.	Original copy of Bid Security. If in the form of a Surety Bond, submit also a certification issued by the Insurance Commission or original copy of Notarized Bid Securing Declaration	48
f.	Organizational chart for the contract to be bid Note: There is no TSU prescribed form. The Bidder may follow any appropriate format. However, the required Key Personnel must be reflected in the Chart, and it shall be duly signed.	49
	List of contractor's key personnel (e.g., Project Manager, Project Engineers, Materials Engineers, and Foremen), to be assigned to the contract to be bid, with their complete qualification and experience data;	50
	List of contractor's major equipment units, which are owned, leased, and/or under purchase agreements, supported by proof of ownership or certification of availability of equipment from the equipment lessor/vendor for the duration of the project, as the case may be	52
g.	Original duly signed Omnibus Sworn Statement (OSS) <u>and</u> if applicable, Original Notarized Secretary's Certificate in case of a corporation, partnership, or cooperative; or Original Special Power of Attorney of all members of the joint venture giving full power and authority to its officer to sign the OSS and do acts to represent the Bidder.	53
h.	The bidder's computation of Net Financial Contracting Capacity (NFCC).	55
II. Financial Documents		
j.	Financial Bid Form	56
k.	Bid Prices in the Bill of Quantities Note: Bidder should download and use the Bill of Quantities in PDF format provided in the File Folder " Refurbishment of TSU Hotel Rooms 314, 316 and 318 for the College of Medicine " with the file name " Bill of Quantities " from the TSU website: www.tsu.edu.ph .	
l.	Detailed estimates, including a summary sheet indicating the unit prices of construction materials, labor rates, and equipment rentals used in coming up with the Bid. Note: Bidder should download and use the Detailed Unit Price Analysis in PDF format provided in the File Folder " Refurbishment of TSU Hotel Rooms 314, 316 and 318 for the College of Medicine " with the file name " DUPA " from the TSU website: www.tsu.edu.ph .	
m.	Cash Flow by quarter or payment schedule Note: There is no TSU prescribed form. The Bidder may use any appropriate form which must be duly signed.	

[Bidder's Letterhead]

[Date]

To: Tarlac State University
Re: Invitation to Bid No.

List Of All Ongoing Government And Private Contracts, Including Contracts Awarded But Not Yet Started

Row 1: Name of Contract Row 2: Location of Project Row 3: Contract Price	Row 1: Procuring Entity/Owner Row 2: Contact Person/Address Row 3: Telephone No.	Nature of Work	Contractor's Role		Row 1: Date of Award Row 2: Date Started Row 3: Date of Completion	% of Accomplishment		Value of Outstanding Works
			Description	% of Participation		Planned	Actual	

Attached herewith are the following documents: Notice of Award, Notice to Proceed (if applicable), and Certificate of Accomplishments (or Statement of Work Accomplished), as evidence in support of the foregoing information.

I/We certify that the foregoing information and all the supporting documents are true and correct.

[Signature]
[Name of Bidder or Authorized Representative]
[Position or Title]

[*Bidder's Letterhead*]

[*Date*]

To: Tarlac State University
Re: Invitation to Bid No.

Statement Of Single Largest Completed Contract Similar To The Contract To Be Bid

Row 1: Name of Contract Row 2: Location	Contract Price	Row 1: Procuring Entity/Owner Row 2: Address Row 3: Contact Person/Tel. No.	Nature of Work	Contract Duration	Date of Award	Date Started	Date Completed

Attached herewith are the following documents: Contract Agreement, Notice of Award, Notice to Proceed, Certificate of Final Inspection, Certificate of Acceptance, and CPES (or equivalent performance evaluation rating), as evidence in support of the foregoing information.

I/We certify that the foregoing information and all the supporting documents are true and correct.

[*Signature*]
[*Name of Bidder*]

BID SECURING DECLARATION

REPUBLIC OF THE PHILIPPINES)
CITY OF _____) S.S.

BID SECURING DECLARATION
Project Identification No.: [Insert number]

To: Tarlac State University,
Romulo Blvd., San Vicente Tarlac City

I/We, the undersigned, declare that:

1. I/We understand that, according to your conditions, bids must be supported by a Bid Security, which may be in the form of a Bid Securing Declaration.
2. I/We accept that: (a) I/we will be automatically disqualified from bidding for any procurement contract with any procuring entity for a period of two (2) years upon receipt of your Blacklisting Order; and, (b) I/we will pay the applicable fine provided under Section 6 of the Guidelines on the Use of Bid Securing Declaration, within fifteen (15) days from receipt of the written demand by the procuring entity for the commission of acts resulting to the enforcement of the bid securing declaration under Sections 23.1(b), 34.2, 40.1 and 69.1, except 69.1(f), of the IRR of RA No. 9184; without prejudice to other legal action the government may undertake.
3. I/We understand that this Bid Securing Declaration shall cease to be valid on the following circumstances:
 - a. Upon expiration of the bid validity period, or any extension thereof pursuant to your request;
 - b. I am/we are declared ineligible or post-disqualified upon receipt of your notice to such effect, and (i) I/we failed to timely file a request for reconsideration or (ii) I/we filed a waiver to avail of said right; and
 - c. I am/we are declared the bidder with the Lowest Calculated Responsive Bid, and I/we have furnished the performance security and signed the Contract.

IN WITNESS WHEREOF, I/We have hereunto set my/our hand/s this ____ day of [month] [year] at [place of execution].

[Insert NAME OF BIDDER OR ITS
AUTHORIZED REPRESENTATIVE]
[Insert signatory’s legal capacity]
Affiant

[Jurat]
[Format shall be based on the latest Rules on Notarial Practice]

[Bidder’s Letterhead]

[Date]

To: Tarlac State University
Re: Invitation to Bid No.

Compliance to the Technical Specifications

Item No.	Description	Bidder’s Compliance State “Comply” below if your offer is complying with the specifications, otherwise state “We are offering the same goods with the following specifications [State the complete specifications of the alternative offer]
SECTION 6 – SUPPLY, DELIVERY, AND INSTALLATION OF OFFICE FURNITURE, APPLIANCES, AND AIR CONDITIONING UNITS		
6.1 OFFICE FURNITURE AND APPLIANCES		
6.1.1	BLINDS: Venetian Duo/Combi Roller Blinds, Brown, Size: 1.80 m width/70 inches, Window Size: 70 inches W x 47 inches H	
6.1.2	BLINDS: Venetian Duo/Combi Roller Blinds, Brown, Size: 1.20 m width/47 inches, Window Size: 94 inches W x 47 inches H	
6.1.3	OFFICE CUBICLES: Low Partition U-Shaped Table with wooden mobile pedestal, CPU Rack and Grommet; Size: 120 cm L x 60 cm W; Panel: Fabric with Glass (Stripe Frosted Sticker); Panel Thickness: 4.68-5.00 cm; Metal frame color: Charcoal Gray	
6.1.4	CHAIR: Swivel Junior Executive; Ergonomic Swivel; Color: Black; Backrest: Mesh; With arm rest; Chrome Leg	
6.1.5	CHAIR: For Conference, Leather Visitor Chair; Chrome Plated Frame; Upholstered in Polyurethane (PU) leather; Padded armrest; Color: Black; Chair Back Height: Mid-back; Size: L 54cm x W 47cm x H 84cm	
6.1.6	TABLES AND CHAIRS: For Students, Table Dimension : Height; 710 (+10), Length: 600 , Width; 400. Chair Dimension : Seat Height; 412 (+10), Seat Depth ; 380 (+10), Seat Width; 370 (+10), Back Height; 800 (+10) Back Width ; 410 (+10). Chair Features: High Density Polyethylene Blow molded plastic seat and back, Color: Pantone 4665c; Metal/ Steel Tubular legs; Table Features: 18.00 mm thk. High Pressure Laminated Table Top, Round corner with 1.00 mm thk. PVC Edging, 4.00 mm thk. x 50 mm x 50 mm Metal Wire Mesh Shelf, Metal/steel Tubular legs, Adjustable Leveler 38 mm ø Plastic Base, Color: pantone 4665c.	
6.1.7	TABLE: For Instructor, Free Standing Table; Dimension: 120 cm L x 60 cm W x 75 cm H; 1” thk. Laminated MDF Table top, Color: Cherry (Brown); Powder Coated Metal Frame Legs with front panel for privacy, Color: Black	
6.1.8	TABLE: For Conference, 8-seater Rectangular Table; Dimension: 180 cm L x 85 cm W x 76 cm H; 6.00 cm thk. High Pressure Laminated Wooden Table Top; Black Metal Tubular Legs	
6.1.9	CABINET: Filing, 4-Drawer Lateral File Cabinet, with 2 Adjustable Hanging Bars (each drawer) for Folders, Ball Bearing Slide Drawers, Anti-tilt locking mechanism, Built-in Lock with 2 Keys - 1 lock secures all drawers, Recessed Plastic Handles, Material: Steel Metal Gauge 24, Color: Powder Coated Light Gray, Dimension: L - 900 mm, W- 450 mm, H - 1380 mm	

6.1.10	CABINET: Filing, 2-Drawer Lateral File Cabinet, with 2 Adjustable Hanging Bars (each drawer) for Folders, Ball Bearing Slide Drawers, Anti-tilt locking mechanism, Built-in Lock with 2 Keys - 1 lock secures all drawers, Recessed Plastic Handles, Material: Steel Metal Gauge 24, Color: Powder Coated Light Gray, Dimension: L - 900 mm, W- 450 mm, H - 750 mm	
6.1.11	SHELF: Wide Book Shelves Cabinet, 5-Layers (Lower Layer-Cabinet, 4-upper layer shelves), Material: Panel - Cold Rolled Steel Sheet, Frames - Metal tube in powder coated finish, Color: Black, Weight Capacity: 110 kgs (Top and Shelf), Size: W - 800 mm, D - 400 mm, H - 1800 mm	
6.1.12	SHELF: Narrow Book Shelves Cabinet, 5-Layers (Lower Layer-Cabinet, 4-upper layer shelves), Material: Panel - Cold Rolled Steel Sheet, Frames - Metal tube in powder coated finish, Color: Black, Weight Capacity: 10 kgs (Top and Shelf), Size: W - 400 mm, D - 400 mm, H - 1800 mm	
6.1.13	STANCHION POST: Retractable Belt Stanchion Post, Stainless Steel – Silver pole and Stand, Belt Color – Red, Belt – 5cm Wide x 2 meters Length, Column Diameter – 63 mm, Height: 90 cm, Stainless steel pipe wall thickened by 0.80mm, Base: Plastic Galvanized iron sheet base, base weight: 5KG. Overall Weight: 7KG	
6.1.14	INTERACTIVE DISPLAY (FIXED AND MOVABLE): Display Screen Size: 65 inches (diagonal) Backlight: LED Aspect ratio: 16:9 Maximum display resolution: 4K UHD (3840 × 2160) Refresh rate: 60 Hz Lifespan ≥ 50,000 hours Brightness: 400 cd/m² Display response time: ≤ 8 ms Viewing angle: 178° Glass: Full heat-tempered Anti-glare Anti-fingerprint Bonded Frame color: White Convenience buttons: Power Home Volume Input select Screen shade Freeze frame Sensors: Proximity Ambient light Infrared Audio: 2 integrated 20 W speakers Integrated linear six-microphone array with support for onboard acoustic echo cancellation NFC: Integrated RFID NFC reader/writer; CCID (chip card interface device) when used with a native operating system driver for Windows®, Linux®, or Mac; Supported protocols: ISO 14443A/B, ISO 15693, NFC Tag 1-4 Interactive Experience Touch technology: HyPr Touch™ with Advanced IR Touch features: Simultaneous tool differentiation, Object Awareness™, Silktouch™ Typical touch response time: ≤ 5 ms Frame rate: ≥ 200 Hz Accuracy: 1 mm Minimum object size: 2 mm Multitouch capabilities: Up to 50 touch points (OS dependent) Tools included: Pens (×2) Tool holders: Magnetic Frame-mounted Software iQ embedded Android OS Operating System: Android version 13.0 Supports an automatic update to Android 15 CPU: Octa-core Memory: 8 GB DDR\$ OS Architecture: 64-bit Storage: 64 GB (up to 576GB)	

	Supports: Digital Whiteboard, Web Browser, Screen Sharing, Play Store Protect, Play Store, Ability to run third-party applications, Cloud Storage Access Other features: Personalized home screen and settings Input select Split screen Picture-in-picture (PIP) with touch pass-through Interactive widgets Templates, graphic organizers, and manipulatives File and app libraries Inputs OPS PC accessory slot microSD slot with security cover HDMI® 2.1 4K @ 60Hz with HDCP 1.4, HDCP 2.3, ARC, and eARC support VGA video Stereo 3.5 mm (variable) RS-232 (DB-9 connector) RJ45 (LAN In) USB Type-C 4K @ 60Hz Display Port 1.2, HDCP 2.3 and HDCP 1.3, USB 2.0 (UFP) for touch and digital audio, USB 3.2 Gen 1 (DFP) for peripherals; 27 W power delivery USB Type-C, 4K @ 60Hz, Display Port 1.2, USB 2.0 (UFP) for touch and digital audio, USB 3.2 Gen 1 (DFP) for peripherals; 65W power delivery USB 2.0 Type-A USB 3.2 Gen 1 Type-A USB 3.2 Gen 1 Type-B Outputs HDMI 2.1 4K @ 60Hz with HDCP 2.3 support USB Type-C 4K @ 60Hz Display Port 1.4a, HDCP 2.3 and HDCP 1.3, USB 3.2 Gen 1 (DFP) for touch ingest and peripherals; 4.5 W power delivery Stereo 3.5 mm (variable) S/PDIF optical (fixed) RJ45 (LAN Out) Connectivity Wired: RJ45 (×2) 1000BASE-T Wi-Fi: IEEE 802.11ax (Wi-Fi 6e) supporting WPA, WPA2, WPA3 PSK, and 802.1X EAP authentication protocols Bluetooth: 5.2 dual mode Included cables and accessories Country-specific power cable: 16' 5" (5 m) USB 2.0 A to B cable, 6' (1.8 m) USB 3.2 Gen 1 Type-C cable, 5A; Pens; External tri-band Wi-Fi (2.4, 5, and 6-7.2 GHz) and Bluetooth® (2.4 GHz) antennas; Remote control with AAA batteries; Illustrated installation instructions; Important information document Storage, Operating requirements, and Power Consumption Power requirements: 100V to 240V AC, 50 Hz to 60 Hz Operating temperature: 41–95°F (5–35°C) Storage temperature: -4–140°F (-20–60°C) Humidity: 5–80% relative humidity, non-condensing Power Consumption: Typical: 90 W Standby: 0.2 W Physical Dimensions & Mounting: Dimensions (W x H x D): 150.7 cm x 92.8 cm x 8.9 cm Weight: 89 lb. (40 kg) Mount: VESA M8 600 x 400 mm Handles: 2 Warranty	
--	--	--

	3-years manufacturer's warranty Additional Accessories: WALL MOUNT, For Fixed Interactive Display: Weight: 9lb. 4 oz. (4.2 kg); Maximum Supported Interactive Display weight: 220 lb. (100 kg); Dimensions (W x H x D): 91 cm x 26 cm x 3.7 cm; Compatible with VESA Mounting hole patterns: 200 mm x 200 mm to 800 mm x 600 mm. With 1-year limited equipment Warranty HEAVY DUTY MOBILE STAND, For Movable/Mobile Interactive Display: Color - Black, Vertical height settings - 58 7/8" (149.4 cm); 55 1/4" (140.4 cm); & 51 3/4" (131.4 cm), Maximum display weight capacity: 265 lb. (120 kg), Maximum stand weight capacity: 297 lb. (135 kg), Wheels: 4" industrial-grade locking casters, Included hardware: Computer mounting bracket (VESA 100 × 100 mm); With 5-year limited equipment warranty	
6.1.15	TELEVISION Display: 55-inch QLED 4K (Resolution) Picture Processor: Q4 AI Processor Color & HDR: Quantum Dot (100% Colour Volume), Quantum HDR, HDR 10+ Support, PANTONE Validated Motion: Motion Xcelerator (50Hz-60Hz native) Gaming: AI Auto Game Mode, Game Bar (21:9 & 32:9 support) Smart TV OS: Tizen OS (7 years OS upgrades) Audio: Adaptive Sound, Object Tracking Sound (OTS Lite) Connectivity: Wi-Fi, Ethernet LAN, Bluetooth, HDMI (ARC Support), USB Dimensions (WxHxD): 1234.1 x 710.8 x 60.3 mm VESA Mounting: 200 x 200 mm Power Supply: AC100-240V~ 50/60Hz Power Consumption: 135 W (Maximum); 84 W (Typical); 0.5 W (Standby) Accessories: Remote Contol, Power Cable, Webcam Support, Full Motion Slim Wall Mount, Slim Fit Wall-mount Support, Dongle Support, User Manual Warranty: 1 year for parts and labor, 6 months for accessories (remote control, wall mount, QLED TV stands and invisible connection cable)	
6.2AIR CONDITIONING UNITS		
6.2.1	1.5 HP Split Type: Wall-Mounted Inverter General Specification Cooling Capacity Max (14,000 BTU/hr) Cooling Capacity Rated/Min BTU/hr (11, 900/4,100) COP 4.43 CSPF 6.68 DOE Star Rating 5 Indoor/ Outdoor H:300mm/550mm,W: 920mm/675mm, D:240mm/284mWeight: 13/27 kg Refrigerant: Type R32, Charge 0.77kg Compressor: Hermetically Sealed Swing Type Air Flow Rate:H/M/L/Q (CFM) 780/600/455/357 Rated Input Voltage(230V,60 Hz, 1ph). Key Features Power Airflow Dual Flaps, Wide Angle Louvers, Vertical and Horizontal Auto-Swing, 3D Airflow, Coanda Effect, Auto Fan Speed, Intelligent Eye, Two-Area Intelligent Eye, Dehumidifier, Fan Operation, Inverter Powerful Operation, Econo Mode, Indoor Unit On/Off Switch, Wireless Remote Controller, Streamer Technology, Deodorizing Enzyme Blue Filter, Saranel Filter, Wipe-Clean Panel, Mold-Proof Operation, Removable Drain Pan, Weekly Timer, 24 Hour On/Off Timer, Count Up-Down On/Off Timer, Night Set Mode/Sleep mode Auto-Restart after Power Failure, Self-Diagnosis with Remote Controller, Anti-Corrosion Treatment of OD HEX fin, Auto Voltage Guard - Super PCB, Wireless, Wireless LAN Adaptor (built-in). Warranty Compressor: 10 Year Compressor	

	Parts & Service: 1 Year Free Cleaning (Included During Warranty Period): At least 1 service Installation Provide PVC cladding/molding for exposed copper tubes. Provide additional copper 20 ft tubing beyond the included 10 ft	
6.2.2	2.0 HP Split Type: Wall-Mounted Inverter General Specification Cooling Capacity Max (21,200BTU/hr) Cooling Capacity Rated/Min BTU/hr(17,700/4,100) COP 3.94 CSPF 6.69 DOE Star Rating 5 Indoor/ Outdoor H: 300mm/595mm,W: 1100mm/845mm, D:240mm/300mmWeight: 15/34 kg Refrigerant: Type R32, Charge 0.6kg Compressor: Hermetically Sealed Swing Type Air Flow Rate: H/M/L/Q (CFM) 636/516/424/339 Rated Input Voltage(230V,60 Hz, 1ph) Key Features Power Airflow Dual Flaps, Wide Angle Louvers, Vertical and Horizontal Auto-Swing, 3D Airflow, Coanda Effect, Auto Fan Speed, Intelligent Eye, Two-Area Intelligent Eye, Dehumidifier, Fan Operation, Inverter Powerful Operation, Econo Mode, Indoor Unit On/Off Switch, Wireless Remote Controller, Streamer Technology, Deodorizing Enzyme Blue Filter, Saranel Filter, Wipe-Clean Panel, Mold-Proof Operation, Removable Drain Pan, Weekly Timer, 24 Hour On/Off Timer, Count Up-Down On/Off Timer, Night Set Mode/Sleep mode Auto-Restart after Power Failure, Self-Diagnosis with Remote Controller, Anti-Corrosion Treatment of OD HEX fin, Auto Voltage Guard - Super PCB, Wireless, Wireless LAN Adaptor (built-in). Warranty Compressor: 10 Year Compressor Parts & Service: 1 Year Free Cleaning (Included During Warranty Period): At least 1 service Installation Provide PVC cladding/molding for exposed copper tubes. Provide additional copper 20 ft tubing beyond the included 10 ft.	
6.2.3	3.0 HP Split Type: Wall-Mounted Inverter General Specification Cooling Capacity Max (21,200BTU/hr) Cooling Capacity Rated/Min BTU/hr(17,700/4,100) COP 3.94 CSPF 6.69 DOE Star Rating 5 Indoor/ Outdoor H: 300mm/595mm,W: 1100mm/845mm, D:240mm/300mmWeight: 15/34 kg Refrigerant: Type R32, Charge 0.6kg Compressor: Hermetically Sealed Swing Type Air Flow Rate: H/M/L/Q (CFM) 636/516/424/339 Rated Input Voltage(230V,60 Hz, 1ph) Key Features Power Airflow Dual Flaps, Wide Angle Louvers, Vertical Auto-Swing, Horizontal Auto-Swing, 3D Airflow, Comfort Airflow Mode, Auto Fan Speed, Indoor Unit Quiet Operation, Outdoor Unit Quiet Operation, Intelligent Eye, Hybrid Dehumidifier, Econo Mode, Deodorizing Enzyme Blue Filter, Saranet Filter, Wipe-clean panel, Mold-Proof Operation, Removable Drain Pan, Weekly Timer, 24 Hour On/Off Timer, Auto Restart after Power Failure, Self-Diagnosis with Remote Controller, Anti-corrosion Treatment of OD HEX fin, All Voltage Guard - Super PCB, Wireless, Wire Land Adaptor Warranty Compressor: 10 Year Compressor Parts & Service: 1 Year Free Cleaning (Included During Warranty Period): At least 1 service	

	Installation Provide PVC cladding/molding for exposed copper tubes. Provide additional copper 20 ft tubing beyond the included 10 ft.	
--	---	--

Note: Bidders must state in the Statement of Compliance either “**Comply**” or “**Not Comply**” against each of the individual parameters of each Specification stating the corresponding performance parameter of the equipment offered. Statements of “Comply” or “Not Comply” must be supported by evidence in a Bidders Bid and cross-referenced to that evidence. Evidence shall be in the form of manufacturer’s un-amended sales literature, unconditional statements of specification and compliance issued by the manufacturer, samples, independent test data etc., as appropriate. A statement that is not supported by evidence or is subsequently found to be contradicted by the evidence presented will render the Bid under evaluation liable for rejection. A statement either in the Bidders statement of compliance or the supporting evidence that is found to be false either during Bid evaluation, post-qualification or the execution of the Contract may be regarded as fraudulent and render the Bidder or supplier liable for prosecution subject to the provision of **ITB** Clause 4.

Attached herewith are the manufacturer’s product literature(s) and certification(s) that we are authorized to sell the goods.

We certify that the foregoing information and the supporting documents are true and correct.

[Signature]

[Name of Authorized Signatory]

[Position/Title of Authorized Signatory]

[Bidder’s Letterhead]

[Date]

To: Tarlac State University
Re: Invitation to Bid No.

We certify that, if the Contract covered by the aforementioned Invitation to Bid is awarded to [BIDDER], we shall employ the following persons to occupy the key positions of the workforce which shall be deployed to implement the project.

LIST OF KEY PERSONNEL		
Name	Position	Duties and Responsibilities
	Civil Engineer / Architect (Project In-charge)	
	Registered Electrical Engineer / Master Electrician	
	Registered Mechanical Engineer	
	Safety Officer II	
	Foreman	

Attached herewith are the Curriculum Vitae of the above-named persons for your evaluation.

[Signature]
[Name of Bidder/Authorized Representative]

[Bidder's Letterhead]

[Date]

To: Tarlac State University
Re: Invitation to Bid No.

CURRICULUM VITAE OF KEY PERSONNEL

POSITION			NAME		
DATE OF BIRTH	HEIGHT	WEIGHT	SEX	CIVIL STATUS	NATIONALITY
PROFESSION			PRC ID NO.	DATE OF REGISTRATION	VALID UNTIL
HOME ADDRESS			CURRENT STATUS OF EMPLOYMENT		
			COMPANY/ ADDRESS		POSITION
RELEVANT WORK EXPERIENCE					
COMPANY/ADDRESS		POSITION	BRIEF JOB DESCRIPTION		INCLUSIVE DATES
RELEVANT TRAININGS					
TITLE OF TRAINING		INCLUSIVE DATES	PLACE	TRAINING PROVIDER	
EDUCATIONAL QUALIFICATIONS					
DEGREE EARNED (Please enumerate all; if not a college graduate, indicate highest level of education earned)			YEAR GRADUATED	NAME OF INSTITUTION	

I certify that the information furnished above are true and correct and that I have voluntarily furnished the foregoing information on my own free will.

I further certify that, if the Contract covered by the aforementioned Invitation to Bid is awarded to [BIDDER], I shall willingly assume the position of [POSITION] for the [BIDDER].

[Signature]
[Name of Prospective Key Personnel]

We certify that, if the Contract covered by the aforementioned Invitation to Bid is awarded to [BIDDER], we shall engage the services of [Name of Prospective Key Personnel] as the [POSITION] for the entire duration of the project covered by the Contract, in accordance with the law.

[Signature]
[Name of Bidder/Authorized Representative]
[Position or Title]

[Bidder's Letterhead]

[Date]

To: Tarlac State University
Re: Invitation to Bid No.
We certify that, if the Contract covered by the aforementioned Invitation to Bid is awarded to [BIDDER], we shall provide and use the equipment listed below in the implementation of the project.

List of Major Equipment									
		Qty.	Model/Year Manufactured	Capacity/Size	Plate No. (if applicable)	Motor No./Body No. (if applicable)	Present Location	Condition	Mode of Acquisition (Owned or Leased)
1.									
2.									
4.									
6.									
7.									
8.									
9.									
10.									

Attached herewith are the *Certificate(s) of Registration, Official Receipt(s), and Lease Agreement(s)* for the aforementioned equipment.

[Signature]
[Name of Bidder or Authorized Representative]
[Position or Title]

OMNIBUS SWORN STATEMENT

REPUBLIC OF THE PHILIPPINES)
CITY/MUNICIPALITY OF _____) S.S.

AFFIDAVIT

I, [Name of Affiant], of legal age, [Civil Status], [Nationality], and residing at [Address of Affiant], after having been duly sworn in accordance with law, do hereby depose and state that:

1. *[Select one, delete the other:]*

[If a sole proprietorship:] I am the sole proprietor or authorized representative of [Name of Bidder] with office address at [address of Bidder];

[If a partnership, corporation, cooperative, or joint venture:] I am the duly authorized and designated representative of [Name of Bidder] with office address at [address of Bidder];

2. *[Select one, delete the other:]*

[If a sole proprietorship:] As the owner and sole proprietor, or authorized representative of [Name of Bidder], I have full power and authority to do, execute and perform any and all acts necessary to participate, submit the bid, and to sign and execute the ensuing contract for [Name of the Project] of the [Name of the Procuring Entity], as shown in the attached duly notarized Special Power of Attorney;

[If a partnership, corporation, cooperative, or joint venture:] I am granted full power and authority to do, execute and perform any and all acts necessary to participate, submit the bid, and to sign and execute the ensuing contract for [Name of the Project] of the [Name of the Procuring Entity], as shown in the attached [state title of attached document showing proof of authorization (e.g., duly notarized Secretary's Certificate, Board/Partnership Resolution, or Special Power of Attorney, whichever is applicable)];

3. [Name of Bidder] is not "blacklisted" or barred from bidding by the Government of the Philippines or any of its agencies, offices, corporations, or Local Government Units, foreign government/foreign or international financing institution whose blacklisting rules have been recognized by the Government Procurement Policy Board, **by itself or by relation, membership, association, affiliation, or controlling interest with another blacklisted person or entity as defined and provided for in the Uniform Guidelines on Blacklisting;**

4. Each of the documents submitted in satisfaction of the bidding requirements is an authentic copy of the original, complete, and all statements and information provided therein are true and correct;

5. [Name of Bidder] is authorizing the Head of the Procuring Entity or its duly authorized representative(s) to verify all the documents submitted;

6. *[Select one, delete the rest:]*

[If a sole proprietorship:] The owner or sole proprietor is not related to the Head of the Procuring Entity, Procurement Agent if engaged, members of the Bids and Awards Committee (BAC), the Technical Working Group, and the BAC Secretariat, the head of the Project Management Office or the end-user unit, and the project consultants by consanguinity or affinity up to the third civil degree;

[If a partnership or cooperative:] None of the officers and members of [Name of Bidder] is related to the Head of the Procuring Entity, Procurement Agent if engaged, members of the Bids and Awards Committee (BAC), the Technical Working Group, and the BAC Secretariat, the head of the Project Management Office or the end-user unit, and the project consultants by consanguinity or affinity up to the third civil degree;

[If a corporation or joint venture:] None of the officers, directors, and controlling stockholders of [Name of Bidder] is related to the Head of the Procuring Entity, Procurement Agent if engaged, members of the Bids and Awards Committee (BAC), the Technical Working Group, and the BAC

Secretariat, the head of the Project Management Office or the end-user unit, and the project consultants by consanguinity or affinity up to the third civil degree;

- 7. *[Name of Bidder]* complies with existing labor laws and standards; and
- 8. *[Name of Bidder]* is aware of and has undertaken the responsibilities as a Bidder in compliance with the Philippine Bidding Documents, which includes:
 - a. Carefully examining all of the Bidding Documents;
 - b. Acknowledging all conditions, local or otherwise, affecting the implementation of the Contract;
 - c. Making an estimate of the facilities available and needed for the contract to be bid, if any; and
 - d. Inquiring or securing Supplemental/Bid Bulletin(s) issued for the *[Name of the Project]*.
- 9. *[Name of Bidder]* did not give or pay directly or indirectly, any commission, amount, fee, or any form of consideration, pecuniary or otherwise, to any person or official, personnel or representative of the government in relation to any procurement project or activity.
- 10. **In case advance payment was made or given, failure to perform or deliver any of the obligations and undertakings in the contract shall be sufficient grounds to constitute criminal liability for Swindling (Estafa) or the commission of fraud with unfaithfulness or abuse of confidence through misappropriating or converting any payment received by a person or entity under an obligation involving the duty to deliver certain goods or services, to the prejudice of the public and the government of the Philippines pursuant to Article 315 of Act No. 3815 s. 1930, as amended, or the Revised Penal Code.**

IN WITNESS WHEREOF, I have hereunto set my hand this __ day of __, 20__ at _____, Philippines.

[Insert NAME OF BIDDER OR ITS AUTHORIZED REPRESENTATIVE]
[Insert signatory’s legal capacity]
Affiant

[Jurat]
[Format shall be based on the latest Rules on Notarial Practice] 65

[Bidder’s Letterhead]

[Date]

To: Tarlac State University
Re: Invitation to Bid No.

NET FINANCIAL CONTRACTING CAPACITY

Based on our Income Tax Return and Audited Financial Statement for the Fiscal Year [YEAR], duly submitted to the Bureau of Internal Revenue, and which form part of our Bid, the summary of our firm’s financial condition is as given below:

		Year [YEAR]
1.	Total Assets	
2.	Current Assets	
3.	Total Liabilities	
4.	Current Liabilities	
5.	Net Worth (1-3)	
6.	Net Working Capital (2-4)	

Based on theaforementioned data and the Value of Outstanding Works from the Statement of All Ongoing Government and Private Contracts, which also form part of our Bid, our Net Financial Contracting Capacity (NFCC) is:

NFCC = [(current asset minus current liabilities) (**15**)] minus [value of all outstanding or uncompleted portions of the projects under ongoing contracts including awarded contracts yet to be started coinciding with the contract to be bid].

NFCC =

I/We certify that the foregoing information and all of the supporting documents are true and correct.

[Signature]
[Name of Bidder or Authorized Representative]
[Position or Title]

[Bidder's Letterhead]

[Date]

FINANCIAL BID FORM

Date : _____

Project Identification No. : _____

To: [name and address of Procuring Entity]

Having examined the Philippine Bidding Documents (PBDs) including the Supplemental or Bid Bulletin Numbers [insert numbers], the receipt of which is hereby duly acknowledged, we, the undersigned, declare that:

- a. We have no reservation to the PBDs, including the Supplemental or Bid Bulletins, for the Procurement Project: [insert name of contract];
- b. We offer to execute the Works for this Contract in accordance with the PBDs;
- c. The total price of our Bid in words and figures, excluding any discounts offered below is: [insert information];
- d. The discounts offered and the methodology for their application are: [insert information];
- e. The total bid price includes the cost of all taxes, such as, but not limited to: [specify the applicable taxes, e.g. (i) value added tax (VAT), (ii) income tax, (iii) local taxes, and (iv) other fiscal levies and duties], which are itemized herein and reflected in the detailed estimates,
- f. Our Bid shall be valid within the a period stated in the PBDs, and it shall remain binding upon us at any time before the expiration of that period;
- g. If our Bid is accepted, we commit to obtain a Performance Security in the amount of [insert percentage amount] percent of the Contract Price for the due performance of the Contract, or a Performance Securing Declaration in lieu of the the allowable forms of Performance Security, subject to the terms and conditions of issued GPPB guidelines¹ for this purpose;
- h. We are not participating, as Bidders, in more than one Bid in this bidding process, other than alternative offers in accordance with the Bidding Documents;
- i. We understand that this Bid, together with your written acceptance thereof⁶⁷ included in your notification of award, shall constitute a binding contract between us, until a formal Contract is prepared and executed; and
- j. We understand that you are not bound to accept the Lowest Calculated Bid or any other Bid that you may receive.
- k. We likewise certify/confirm that the undersigned, is the duly authorized representative of the bidder, and granted full power and authority to do, execute and perform any and all acts necessary to participate, submit the bid, and to sign and execute the ensuing contract for the [Name of Project] of the [Name of the Procuring Entity].
- l. We acknowledge that failure to sign each and every page of this Bid Form, including the Bill of Quantities, shall be a ground for the rejection of our bid.

Name: _____

Legal Capacity: _____

Signature: _____

Duly authorized to sign the Bid for and behalf of: _____

Date: _____

¹ currently based on GPPB Resolution No. 09-2020